




PRODUCT BULLETIN

Manhole Ladder Type IAA Series FE8900

**Available in US Warehouses
in November 2018**

New *Hi-Vis* protectors on FE8900 Series

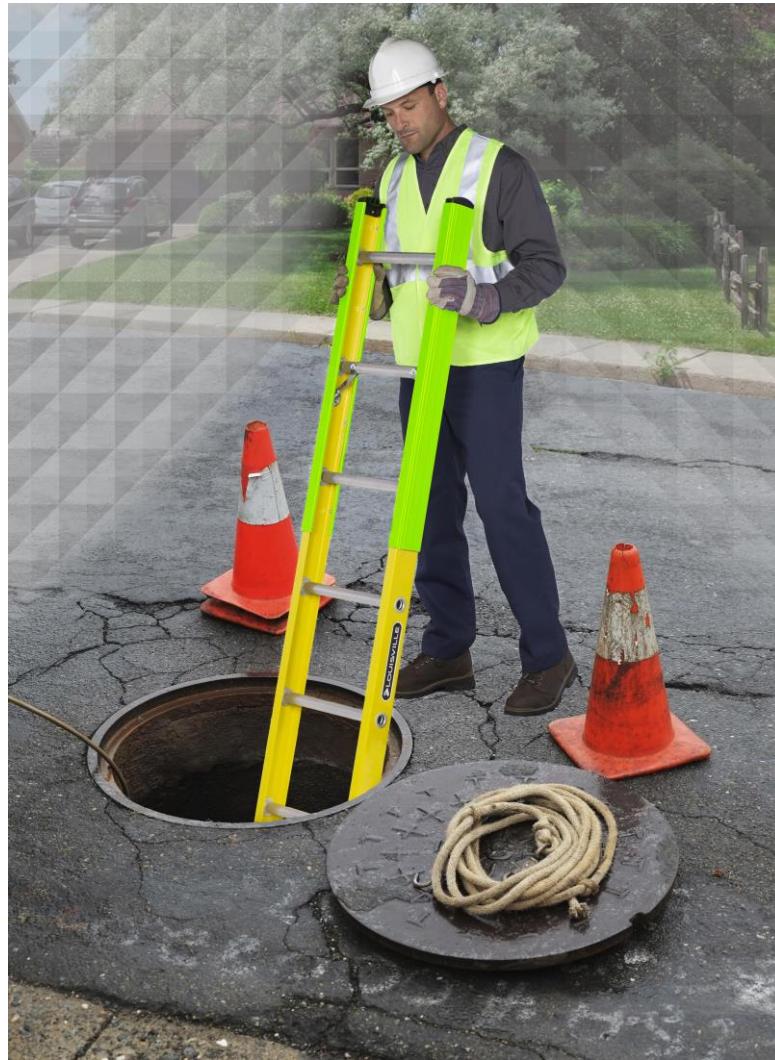

Meets ANSI*, OSHA and CSA* standards
*Special Purpose



PRODUCT BULLETIN

Manhole ladder FE8900 series Now with Hi-Vis rail protectors



PRODUCT FEATURES

Introducing High Visibility Green on the FE8900 Fiberglass Manhole Series



**High-visibility tools improve other's
ability to see you.**

**From people on the job site to cars on
the Street, by increasing the visibility,
you reduce the risk.**

**High visibility tools are very important
to increase work safety on any Job
Site**

PRODUCT BULLETIN



Manhole ladder FE8900 series Now with Hi-Vis rail protectors

PRODUCT FEATURES

- Double side 3ft plastic rail protectors to avoid manhole rim damage.
- Heavy duty gussets under steps



New Heavy Duty 180° Boots allow you to work on either side of the ladder.



Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot.

Polypropylene copolymer upper boot provides strength, durability and fiberglass protection.

PRODUCT BULLETIN

Manhole ladder FE8900 series Now with Hi-Vis rail protectors



Product Specs

Description	New FE8900
Outside Width (in)	14-1/2
Inside Width (in)	12-1/8
Rail Depth (in)	3-1/4
Load Capacity (lbs)	375

Model	Total Length Ft	Highest standing level	Maximum Reach	Approx. Volume ft ³	Approx. Weight FE8900 Lbs
FE8908	8	4' 7"	11' 2"	3.2	18
FE8910	10	6' 6"	13' 1"	4.0	21
FE8912	12	8' 6"	15' 1"	4.7	25
FE8914	14	10' 5"	17' 0"	5.5	28
FE8916	16	12' 4"	18' 11"	6.3	34
FE8918	18	14' 3"	20' 10"	7.1	39
FE8920	20	16' 3"	22' 10"	7.8	43



PRODUCT BULLETIN



Manhole ladder FE8900 series Now with Hi-Vis rail protectors

Replacement Parts

Replacement Part	Model
PK1013	Shoe Kit 2 pc
PK1219	Green Plastic sleeves 2 pc
PK-FE8900	Label Kit

