Wiring Diagram

20CL65	REV. 1

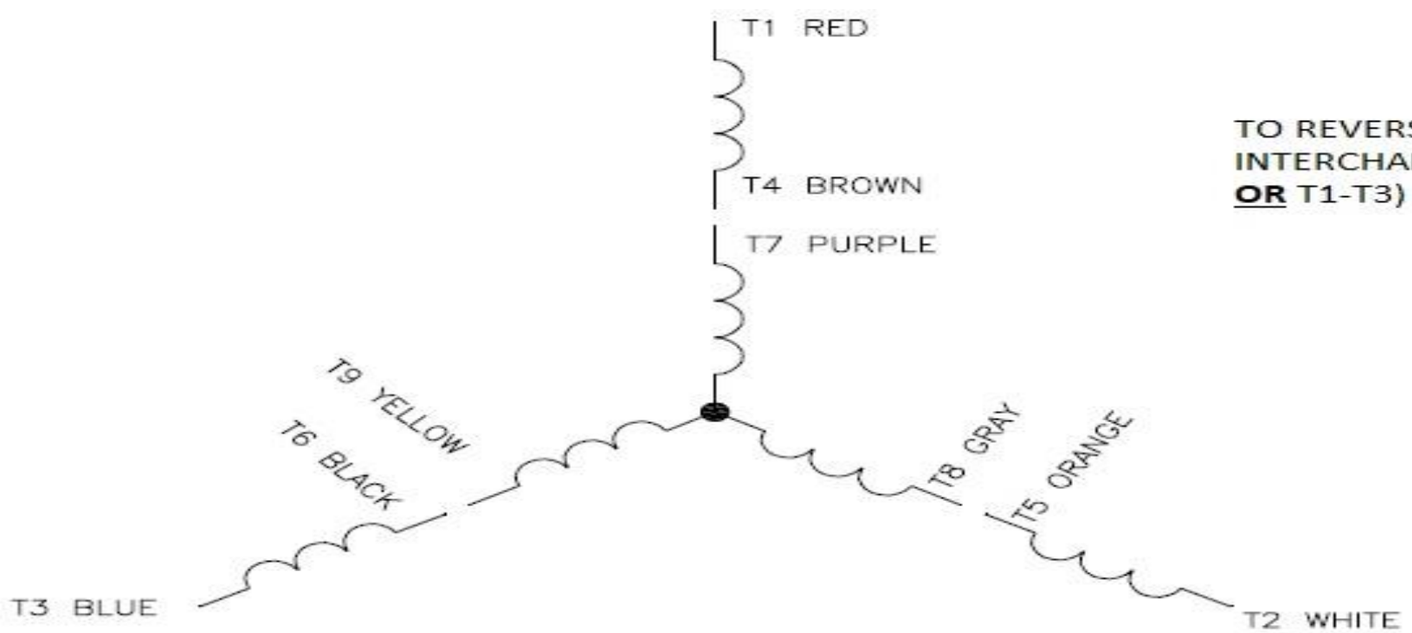

TO REVERSE ROTATION FOR EITHER VOLTAGE, INTERCHANGE ANY **2** LINE LEADS (T1-T2, T2-T3 **OR** T1-T3)

CONNECT AS FOLLOWS

HIGH VOLTAGE

T1 —	RED —	LINE A
T2 —	WHITE —	LINE B
T3 —	BLUE —	LINE C
T4 —	BROWN	TIE TOGETHER
T7 —	PURPLE	
T5 —	ORANGE	TIE TOGETHER
T8 —	GRAY	
T6 —	BLACK	TIE TOGETHER
T9 —	YELLOW	

CCW ROTATION; TO REVERSE ROTATION FOR EITHER VOLTAGE INTERCHANGE ANY TWO LINE LEADS

LOW VOLTAGE

T1 —	RED	LINE A
T7 —	PURPLE	
T2 —	WHITE	LINE B
T8 —	GRAY	
T3 —	BLUE	LINE C
T9 —	YELLOW	
T5 —	ORANGE	TIE TOGETHER
T6 —	BLACK	
T4 —	BROWN	

DRAWING NO.	PAGE OF	REV.
20CL65		1

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

©2019 W.W. Grainger, Inc. This design may not be reproduced, modified or redistributed without written permission from W.W. Grainger, Inc.