
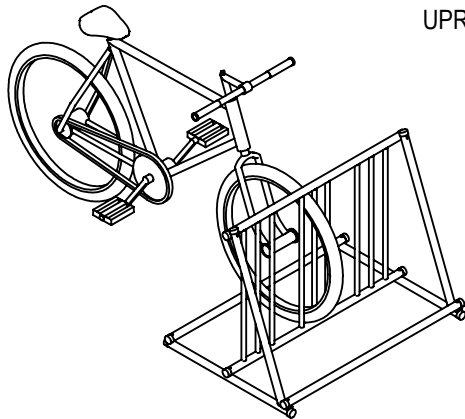


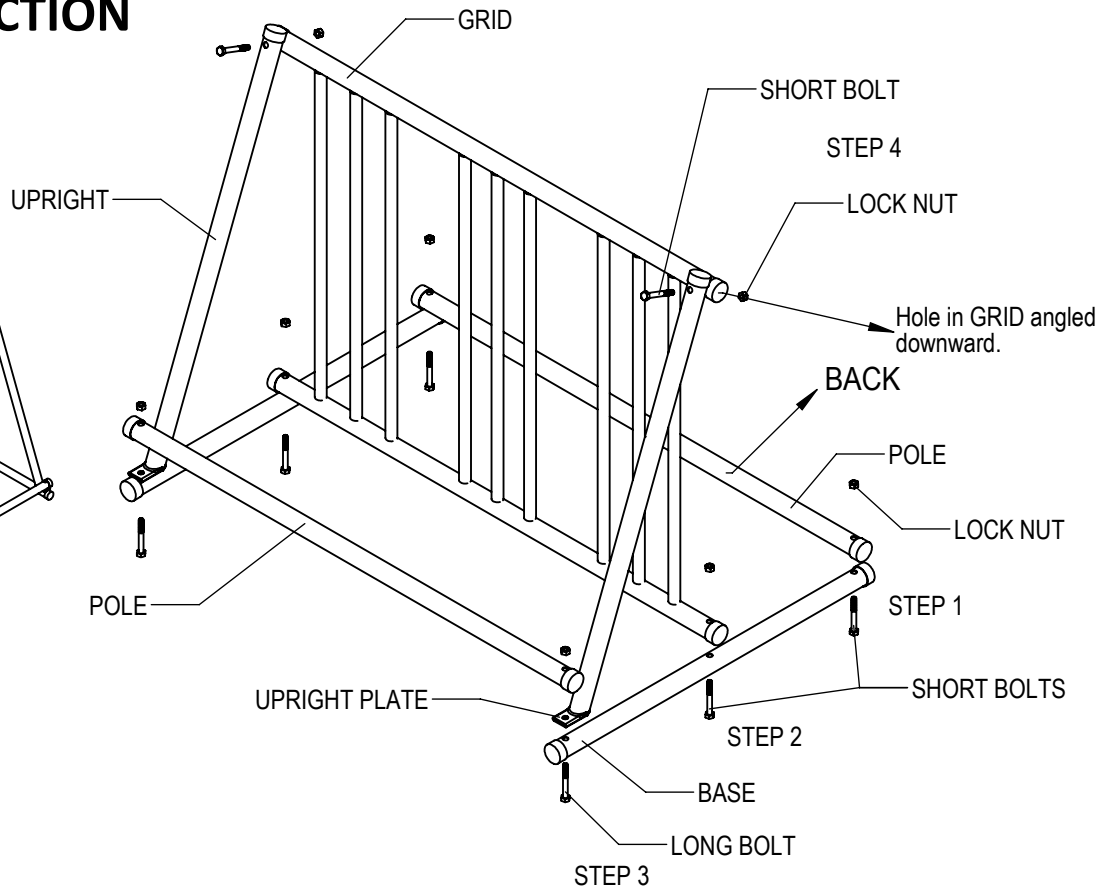

## GS200 Grandstand ASSEMBLY INSTRUCTION

**Made in USA**

Unpack and check parts list (below) to make sure all parts are available.  
All of the plastic end caps have been inserted for your convenience.


**STEP 1:** Insert SHORT BOLT upward through hole in BASE and POLE. Secure loosely with LOCK NUT. Repeat on other end of stand.

**STEP 2:** Align bottom holes of GRID with middle hole in BASE. (Note: GRID can be positioned only one correct way when mounting. The holes on top of the GRID are punched diagonally through the tube at a slight downward angle to the *BACK* of the stand.) Insert SHORT BOLT upward through the BASE and GRID and secure loosely with LOCK NUT. Repeat on other end of stand.

**STEP 3:** Insert LONG BOLT upward through BASE, UPRIGHT PLATE and POLE. Secure loosely with LOCK NUT. Repeat on other end of stand.


**STEP 4:** Insert SHORT BOLT through hole at the top of the UPRIGHT and end of GRID. Secure loosely with LOCK NUT. Repeat on other end of stand.  
(Note: If you cannot insert the SHORT BOLT through the UPRIGHT and GRID, review STEP 2 and reposition GRID.)

**STEP 5:** Tighten all fasteners.



### PARTS LIST

Part	Quantity
GRID	1
UPRIGHTS	2
BASES	2
POLES	2
SHORT BOLTS: 5/16"-18X2 1/2"	6
LONG BOLTS: 5/16"-18X2 3/4"	2
LOCK NUTS: 5/16"	8

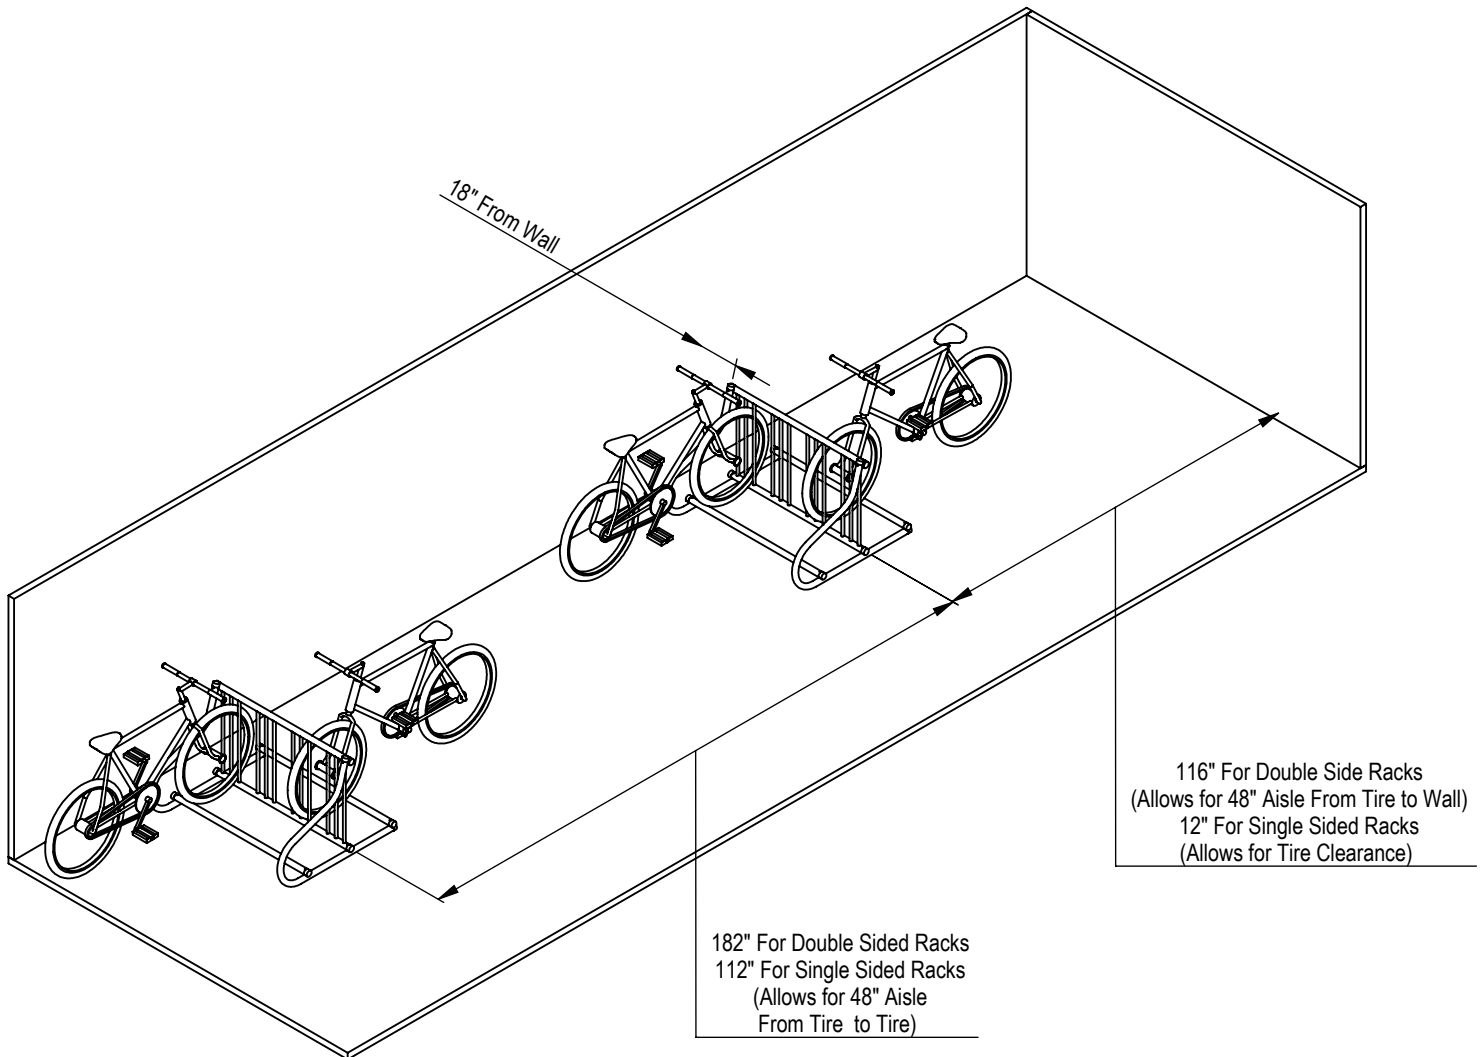

## Gridrac Rack Installation Guide

### CHECK LOCAL CODES

Installation Guide Applies to The Following Madrax Bike Racks:

- Gridrac
- Grand Stand
- Uptown

DATE: 7-11-12  
ENG: SMC

There must be at least a six foot clear walkway from buildings to comply with the American with Disabilities Act. The bicycle rack cannot be located directly in front of a store entrance or exit, nor in a driveway. The bicycle rack cannot be located closer to the curb than two feet. Three feet from curb is ideal, although in certain circumstances, the distance may be greater.

The footprint of a bicycle is approximately 2 feet by 6 feet.  
Some handlebars can be as much as 30 inches wide.

#### NOTES:

1. INSTALL BIKE RACKS ACCORDING TO MANUFACTURER'S SPECIFICATIONS.
2. CONSULTANT TO SELECT COLOR(FINISH), SEE MANUFACTURER'S SPECIFICATIONS.
3. SEE SITE PLAN FOR LOCATION OR CONSULT OWNER.

CONFIDENTIAL DRAWING AND INFORMATION IS NOT TO BE COPIED OR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF GRABER MANUFACTURING, INC., FORMERLY TRILARY, INC. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.