

Dimensional Drawing




5K565BG

REV.
-

VAR	MODEL	CUST. PT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	T63CXDAW-2231	5K565BG	13.88	-----	-----	-----	1 1/2	115/208-230	1.15	14.4/8.0-7.2	60	1725	---	AUTO	56H, TEFC, BALL BEARING

KEY AND INSTRUCTION BOOK
SHIPPED AS A KIT IN A PLASTIC BAG

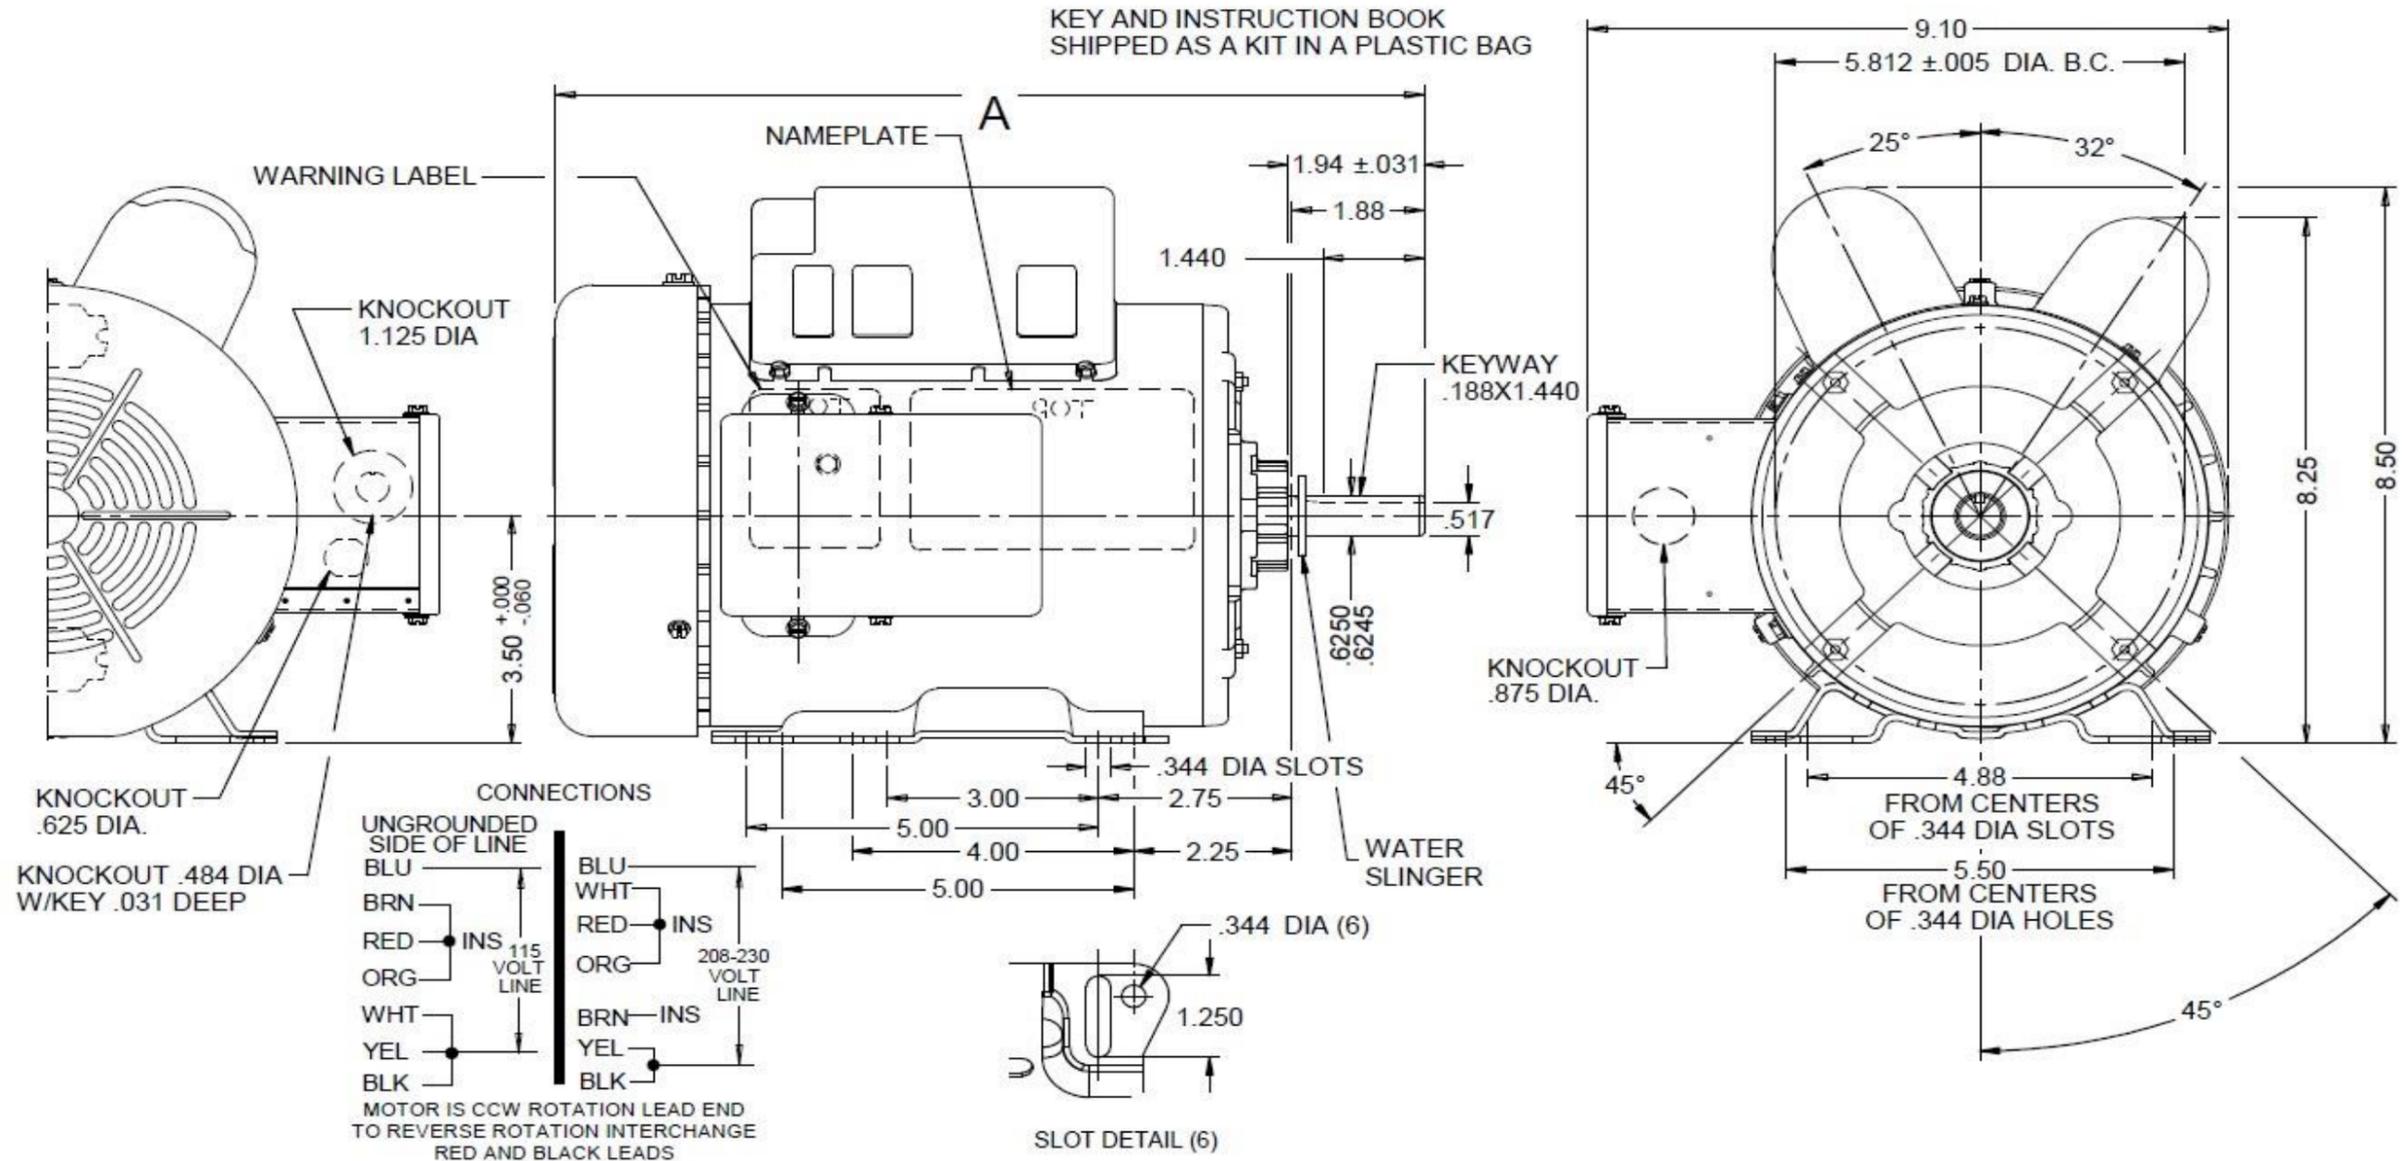

DRAWING NO.	PAGE 1 of 1	REV.
5K565BG		-

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

Performance Data



5K565BG

REV.
-

MOTOR PERFORMANCE

HP:	1 1/2						
Poles:	4						
No. of Speeds:	1						
Volts:	115/208-230	115	208	230			
HZ:	60	60	60	60			
Service Factor:	1.15						
Efficiency:	@ Rated Load	81.0	79.6	81.2			
Power Factor:	@ Rated Load	93.2	93.5	92.9			
Amps:	@ No Load						
	@ Rated Load	13	7.2	6.5			
	@ Service Factor	14.9	8.4	7.5			
	@ Locked Rotor	104.7	46.9	52.9			
RPM:	@ Rated Load	1741	1727	1743			
Ambient (°C):	40						
Altitude (FASL):							
Torques:	Breakdown	172.6	141.2	176.3			
	Locked Rotor	206.3	160.4	195.2			
	Pull-Up	192.7	152.7	195			
	Rated Load	73	73	73			
	Service Factor	83.7	84.6	83.6			
Watts:	Rated Load	1395	1407	1393			
KVA Code:	K	K	H	K			
Temperature Rise:	@ Rated Load	57.8	62.5	57.2			
	@ Service Factor	71	84.5	68.3			
Thermal Protector:	Trip Temp (°C)	145.2	145.3	151.5			
Winding Material:	Start (Auxiliary)	Cu	Cu	Cu			
	Run (Main)	Cu	Cu	Cu			
Capacitor(s):	Start (MFD / Volts)	709 mFd, 125V					
	No. of Start Capacitors						
	Run (MFD / Volts)	50 mFd, 370V					
	No. of Run Capacitors						

LOW SPEED PERFORMANCE DATA:

HP:							
Poles:							
Volts:							
HZ:							
Efficiency:	@ Rated Load						
Power Factor:	@ Rated Load						
Amps:	@ No Load						
	@ Rated Load						
	@ Service Factor						
	@ Locked Rotor						
Torques:	Bead Down						
	Locked Rotor						
	Pull-Up						
	Rated Load						
	Service Factor						
Watts:	@ Rated Load						
Temperature Rise:	@ Rated Load						
	@ Service Factor						

DRAWING NO. PAGE 1 of 1 REV.
5K565BG -

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

Performance Data




5K565BG		REV.
Dayton Manufacturing Company		
Motor Description		Test Conditions
Model:	T063DAW2231 5K565BG	Test Type: Start
Motor ID:	1	Test Number: 1
Poles:	4	Poles: 4
Volts:	115/208-230	Volts: 115
Frequency:	60	Hz: 60
HP:	1 1/2	Rotation:
Speed:	1725	Special Cond:
Phase:	1	Speed Conn: 3 line
Protector:	CEJ38CS	TestBoard: Amtps Performance Fixture #2
		Run Cap: 50 µFd
		Start Cap: 709 µFd
		Environment:
		Tested: 3/22/2006 9:17:41 AM
		Tested By: Sharp, Gerald
		Gear Ratio: 1:1
		Bearing Friction: -1.28 Oz-Ft
		Windage Torque: -2.88 Oz-Ft
Special Points	Vline (V)	Vaux (V)
	Vcap (V)	Iline (A)
	Imain (A)	Iaux (A)
	Watts	RPM
	Tq(Oz-ft)	HP
	Eff(%)	PF(%)
	Cap	
	115.0	140.5
	115.0	140.5
	115.0	141.4
	115.0	141.8
	115.0	142.5
	115.0	142.8
	115.0	143.6
	115.0	145.9
	115.0	150.3
	115.0	154.1
	115.0	157.2
	115.0	159.9
	115.0	162.5
	115.0	164.9
PUT OZ-FT	115.0	166.2
	115.0	167.3
	115.0	169.7
	115.0	172.3
	115.0	175.0
	115.0	178.0
	115.0	181.1
	115.0	184.1
	115.0	187.6
	115.0	190.8
	115.0	194.4
	115.0	197.8
	115.0	201.0
	115.0	204.5
	115.0	207.9
	115.0	211.1
	115.0	211.9
	109.2	108.7
	107.0	107.0
	104.8	104.14
	102.4	103.56
	99.2	102.54
	95.9	102.00
	93.0	102.53
	91.8	104.29
	91.9	105.32
	91.5	105.33
	90.7	104.93
	90.0	104.33
	89.2	103.68
	88.8	103.30
	88.4	102.88
	87.6	102.00
	87.3	101.17
	87.2	100.29
	87.7	99.48
	88.6	98.74
	89.8	97.98
	91.4	97.22
	93.1	96.53
	95.3	95.80
	97.6	95.17
	100.0	94.53
	102.4	93.94
	105.1	93.35
	108.0	92.79
	108.5	92.63
	79.50	79.38
	79.06	79.06
	78.54	78.54
	77.85	77.85
	77.08	77.08
	76.75	76.75
	77.14	77.14
	77.82	77.82
	77.62	77.62
	76.92	76.92
	76.08	76.08
	75.20	75.20
	74.39	74.39
	73.57	73.57
	72.78	72.78
	72.00	72.00
	71.24	71.24
	70.51	70.51
	69.76	69.76
	69.07	69.07
	68.36	68.36
	67.69	67.69
	67.00	67.00
	66.43	66.43
	65.85	65.85
	65.29	65.29
	64.71	64.71
	64.14	64.14
	63.98	63.98
	37.05	36.92
	36.28	36.28
	35.50	35.50
	34.62	34.62
	33.54	33.54
	32.31	32.31
	31.25	31.25
	30.87	30.87
	30.91	30.91
	30.79	30.79
	30.52	30.52
	30.24	30.24
	29.96	29.96
	29.68	29.68
	29.41	29.41
	29.31	29.31
	29.32	29.32
	29.48	29.48
	29.78	29.78
	30.21	30.21
	30.79	30.79
	31.43	31.43
	32.23	32.23
	33.03	33.03
	33.89	33.89
	34.83	34.83
	35.84	35.84
	36.87	36.87
	37.14	37.14
	10407	10391
	10374	10374
	10349	10349
	10292	10292
	10185	10185
	10082	10082
	10073	10073
	10239	10239
	10385	10385
	10453	10453
	10458	10458
	10452	10452
	10401	10401
	10347	10347
	10270	10270
	10202	10202
	10135	10135
	10083	10083
	10008	10008
	9950	9950
	9900	9900
	9853	9853
	9809	9809
	9761	9761
	9712	9712
	9671	9671
	9635	9635
	9594	9594
	9590	9590
	11	23
	131	240
	345	445
	535	620
	701	779
	852	922
	987	1049
	1049	1106
	1106	1159
	1209	1256
	1300	1341
	1341	1379
	1415	1447
	1447	1480
	1508	1508
	1535	1535
	1560	1560
	1583	1583
	1606	1606
	1611	1611
	206.3	211.7
	206.6	210.5
	218.7	228.4
	228.4	228.2
	216.6	204.8
	200.7	200.8
	200.8	200.5
	198.4	198.4
	194.8	194.8
	189.8	189.8
	183.2	183.2
	175.1	175.1
	166.5	166.5
	155.9	155.9
	144.6	144.6
	133.3	133.3
	120.1	120.1
	106.7	106.7
	90.6	90.6
	73.5	73.5
	57.3	57.3
	43.6	43.6
	23.8	23.8
	5.5	5.5
	0.0	0.0
	0.028	0.058
	0.323	0.602
	0.898	1.210
	1.454	1.454
	1.600	1.709
	1.861	1.861
	2.038	2.038
	2.200	2.200
	2.332	2.332
	2.432	2.432
	2.498	2.498
	2.528	2.528
	2.521	2.521
	2.490	2.490
	2.412	2.412
	2.308	2.308
	2.189	2.189
	2.023	2.023
	1.838	1.838
	1.596	1.596
	1.319	1.319
	1.047	1.047
	0.810	0.810
	0.448	0.448
	0.105	0.105
	0.0	0.0
	0.2	0.4
	2.3	4.3
	6.5	8.9
	10.8	11.8
	12.5	12.5
	13.4	13.4
	14.5	14.5
	15.7	15.7
	16.6	16.6
	17.4	17.4
	18.0	18.0
	18.4	18.4
	18.4	18.4
	18.3	18.3
	17.8	17.8
	17.2	17.2
	16.4	16.4
	15.2	15.2
	13.9	13.9
	12.1	12.1
	10.1	10.1
	8.0	8.0
	6.3	6.3
	3.5	3.5
	0.8	0.8
	0.0	0.0
	86.5	86.3
	86.3	86.3
	86.4	86.4
	86.4	86.4
	86.4	86.4
	86.4	86.4
	86.0	86.0
	85.4	85.4
	85.4	85.4
	85.7	85.7
	87.1	87.1
	87.2	87.2
	87.5	87.5
	87.6	87.6
	87.7	87.7
	88.1	88.1
	88.3	88.3
	88.6	88.6
	88.8	88.8
	89.0	89.0
	89.2	89.2
	89.3	89.3
	89.5	89.5
	89.7	89.7
	89.9	89.9
	90.0	90.0
	900.3	901.2
	899.6	899.6
	898.6	898.6
	896.9	896.9
	897.0	897.0
	893.8	893.8
	891.7	891.7
	891.9	891.9
	892.6	892.6
	892.4	892.4
	892.7	892.7
	891.6	891.6
	891.4	891.4
	890.9	890.9
	890.3	890.3
	890.5	890.5
	891.5	891.5
	891.1	891.1
	891.9	891.9
	892.1	892.1
	893.5	893.5
	895.2	895.2
	896.9	896.9
	898.0	898.0
	899.1	899.1
	902.2	902.2
	904.2	904.2
	905.9	905.9
	907.5	907.5
DRAWING NO.	PAGE 1 of 8	REV.
	5K565BG	-

Performance Data



5K565BG REV.
-

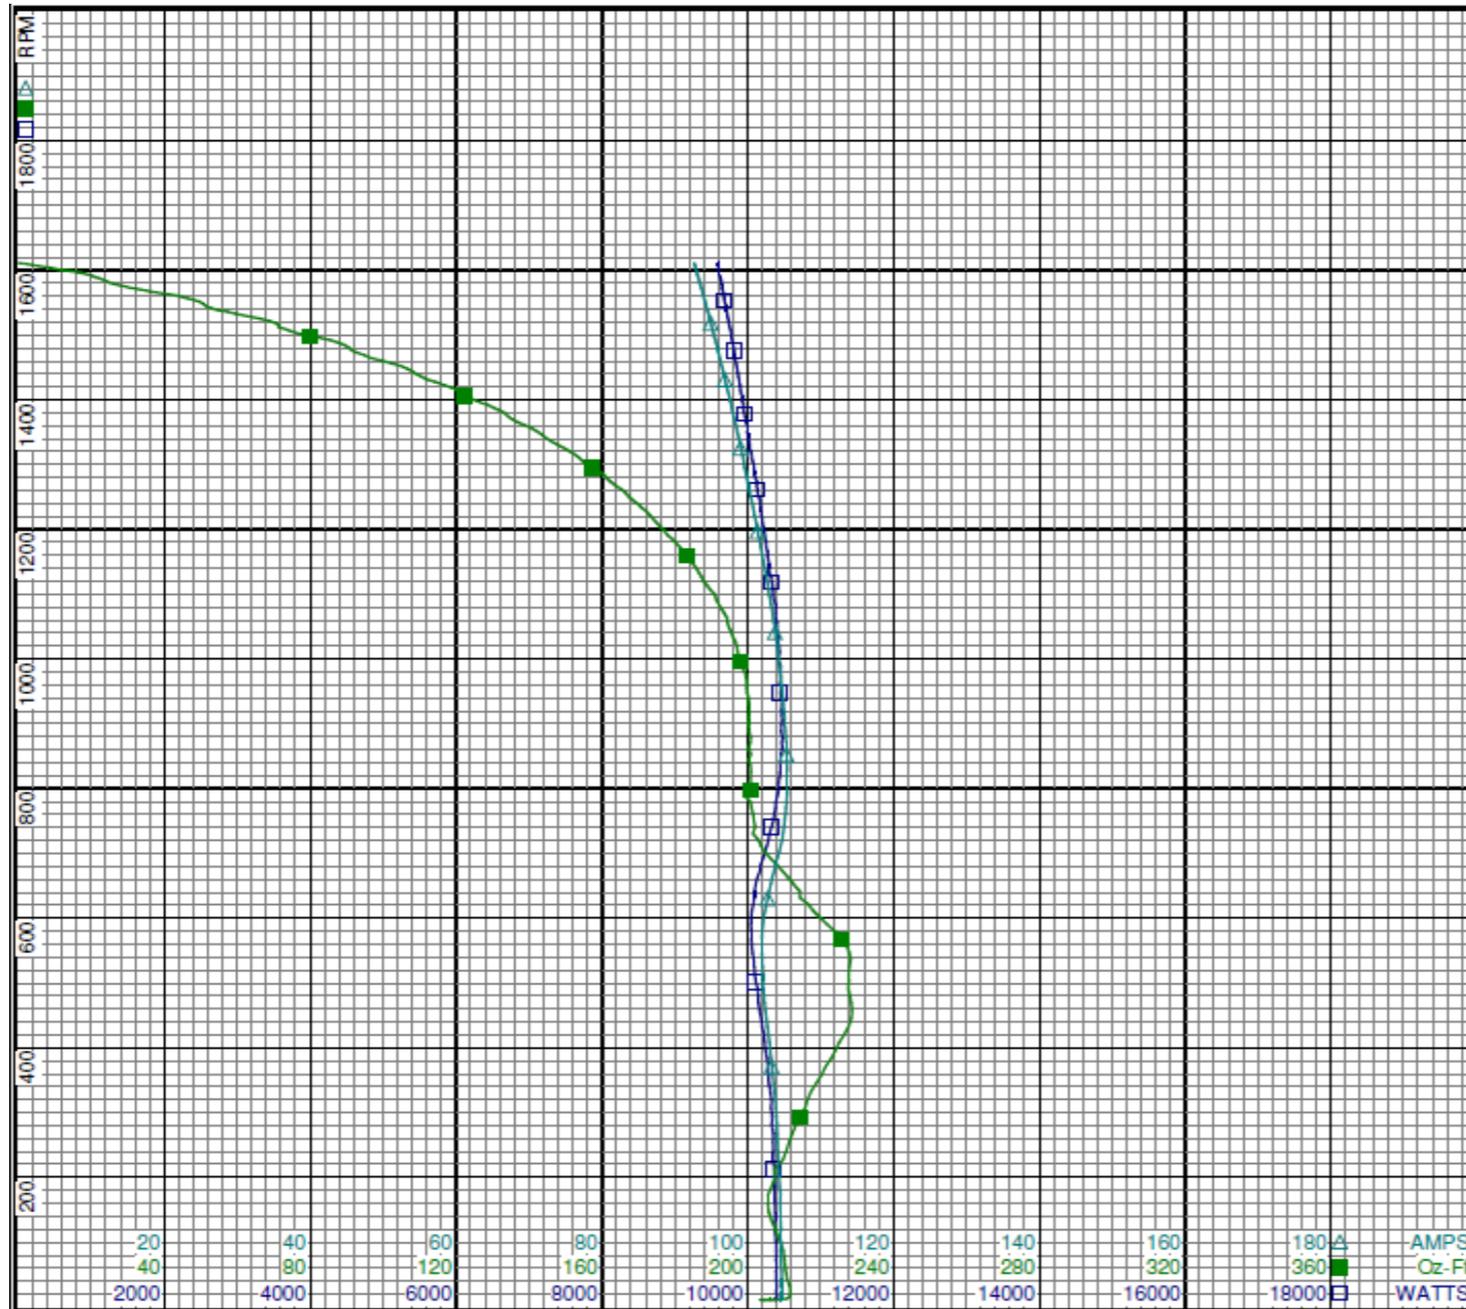

Curve Descriptions:
 Motor(1) Test 1 Start 115V 60 Hz 4P
 3 line
 □ SPEED vs WATTS
 ■ SPEED vs TORQUE
 △ SPEED vs ILine

Motor Ratings:
 (1) T063DAW2231 5K565BG

DRAWING NO. PAGE 2 of 8 REV.
 5K565BG -


Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

©2019 W.W. Grainger, Inc. This design may not be reproduced, modified or redistributed without written permission from W.W. Grainger, Inc.

Performance Data



5K565BG REV. -

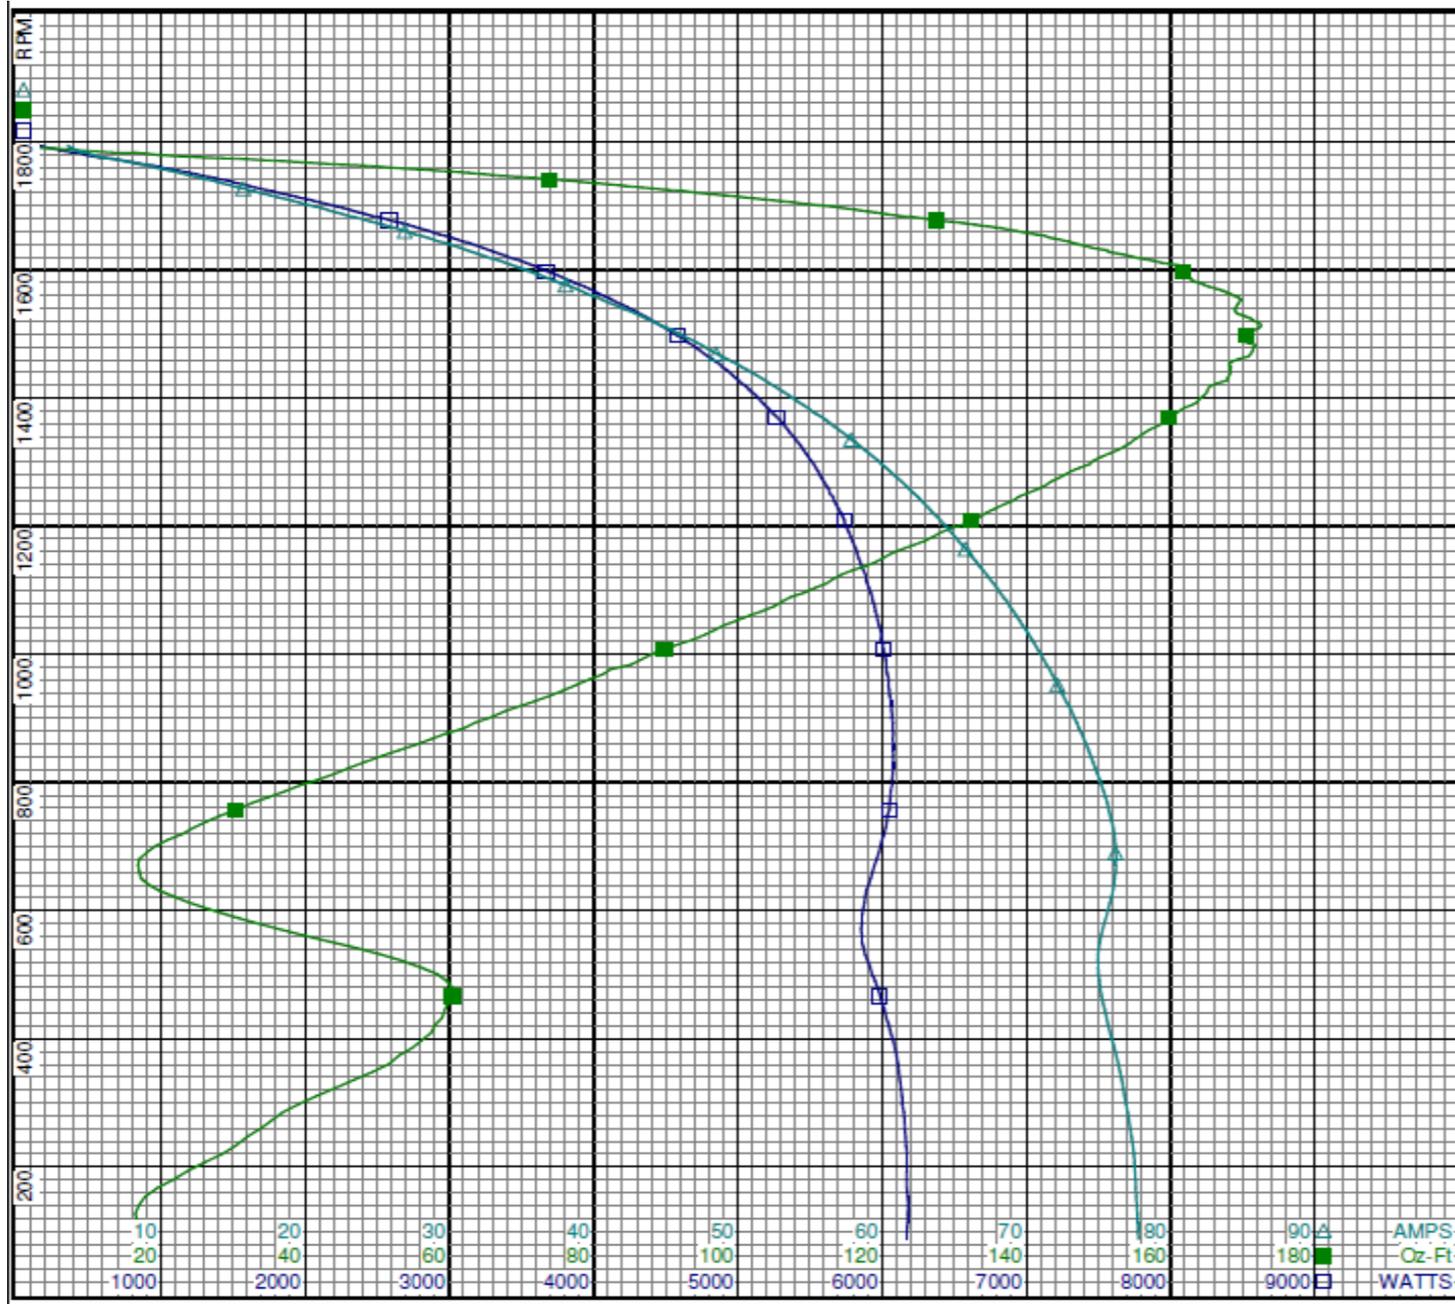

Dayton

Curve Descriptions:
Motor(1) Test 2 Run 115V 60 Hz 4P

- SPEED vs WATTS
- SPEED vs TORQUE
- △ SPEED vs ILine

Motor Ratings:
(1) T063DAW2231 5K565BG

DRAWING NO. PAGE 4 of 8 REV.
5K565BG -

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

©2019 W.W. Grainger, Inc. This design may not be reproduced, modified or redistributed without written permission from W.W. Grainger, Inc.

Performance Data




5K565BG		REV.	Dayton Manufacturing Company										
Motor Description			Test Conditions										
Model:	T063DAW2231	5K565BG	Test Type:	Start	Run Cap:	50 µFd							
Motor ID:	1		Test Number:	9	Start Cap:	709 µFd							
Poles:	4		Poles:	4	Environment:								
Volts:	115/208-230		Volts:	230	Tested:	3/22/2006 12:47:06 PM							
Frequency:	60		Hz:	60	Tested By:	Sharp, Gerald							
HP:	1 1/2		Rotation:		Gear Ratio:	1:1							
Speed:	1725		Special Cond:		Bearing Friction:	0.00 Oz-Ft							
Phase:	1		Speed Conn:	3 line	Windage Torque:	-0.48 Oz-Ft							
Protector:	CEJ38CS		TestBoard:	Amps Performance	Fixture #2								
Special Points	Vline (V)	Vaux (V)	Vcap (V)	Iline (A)	Imain (A)	Iaux (A)	Watts	RPM	Tq(Oz-ft)	HP	Eff (%)	PF (%)	Cap
PUT OZ-FT	230.0	230.9	103.7	52.86	34.21	35.11	10379	12	195.2	0.027	0.2	85.4	897.7
	230.0	230.9	103.7	52.84	34.11	35.13	10377	22	195.0	0.052	0.4	85.4	898.5
	230.0	230.9	103.7	52.84	34.11	35.13	10377	22	195.0	0.052	0.4	85.4	898.5
	230.0	232.6	101.8	52.76	33.55	34.42	10360	132	196.2	0.307	2.2	85.4	896.5
	230.0	234.1	99.6	52.54	32.83	33.64	10316	241	202.3	0.579	4.2	85.4	895.5
	230.0	235.8	97.2	52.21	32.05	32.79	10268	345	211.9	0.871	6.3	85.5	895.2
	230.0	237.1	94.3	51.68	31.37	31.75	10158	444	221.8	1.174	8.6	85.5	893.1
	230.0	238.9	90.9	51.33	30.85	30.53	10027	536	223.0	1.424	10.6	84.9	890.7
	230.0	242.0	87.5	51.46	30.48	29.36	9991	622	215.0	1.592	11.9	84.4	889.5
	230.0	247.0	86.7	52.29	29.74	28.96	10146	704	204.1	1.709	12.6	84.4	886.4
	230.0	251.6	86.2	52.72	28.63	28.89	10305	780	201.7	1.872	13.6	85.0	889.3
	230.0	255.1	85.6	52.70	27.55	28.69	10357	854	203.2	2.065	14.9	85.5	888.6
	230.0	258.4	84.7	52.46	26.57	28.38	10369	923	204.8	2.251	16.2	85.9	888.8
	230.0	261.7	83.7	52.10	25.68	28.04	10346	989	204.3	2.404	17.3	86.3	889.0
	230.0	264.8	82.7	51.68	24.90	27.72	10294	1049	202.8	2.532	18.4	86.6	889.4
	230.0	267.6	81.8	51.22	24.24	27.39	10209	1107	199.2	2.624	19.2	86.7	888.1
	230.0	270.7	81.1	50.73	23.74	27.13	10141	1160	194.3	2.682	19.7	86.9	887.7
	230.0	273.8	80.6	50.24	23.26	26.99	10079	1210	188.4	2.714	20.1	87.2	887.7
	230.0	277.1	80.6	49.76	22.87	26.99	9992	1257	181.1	2.709	20.2	87.3	888.1
	230.0	280.2	81.0	49.26	22.54	27.10	9906	1301	172.9	2.678	20.2	87.4	887.6
	230.0	283.8	81.8	48.81	22.30	27.40	9859	1342	162.9	2.601	19.7	87.8	889.1
	230.0	287.0	83.0	48.34	22.11	27.80	9764	1380	152.0	2.497	19.1	87.8	888.8
	230.0	290.6	84.6	47.90	22.01	28.34	9709	1415	140.0	2.359	18.1	88.1	888.9
	230.0	294.4	86.3	47.47	21.99	29.01	9659	1449	127.3	2.196	17.0	88.5	891.6
	230.0	297.9	88.2	47.11	22.04	29.73	9596	1479	113.5	1.998	15.5	88.6	894.0
	230.0	301.5	90.5	46.71	22.18	30.55	9542	1508	101.6	1.824	14.3	88.8	895.3
	230.0	304.7	92.9	46.32	22.36	31.41	9483	1535	88.0	1.608	12.7	89.0	897.0
	230.0	308.2	95.5	45.92	22.62	32.37	9423	1561	69.6	1.294	10.2	89.2	898.8
	230.0	311.6	98.2	45.56	22.94	33.34	9368	1585	51.5	0.972	7.7	89.4	900.2
	230.0	315.0	100.8	45.20	23.29	34.34	9323	1606	38.2	0.731	5.8	89.7	903.7
	230.0	317.9	103.4	44.88	23.67	35.30	9266	1627	18.9	0.366	3.0	89.8	905.3
	230.0	321.0	106.3	44.52	24.04	36.36	9208	1646	3.8	0.074	0.6	89.9	906.9
	230.0	321.9	107.0	44.42	24.18	36.67	9196	1652	0.0	0.000	0.0	90.0	909.2

DRAWING NO.	PAGE 5 of 8	REV.
	5K565BG	-

Performance Data



5K565BG REV. -

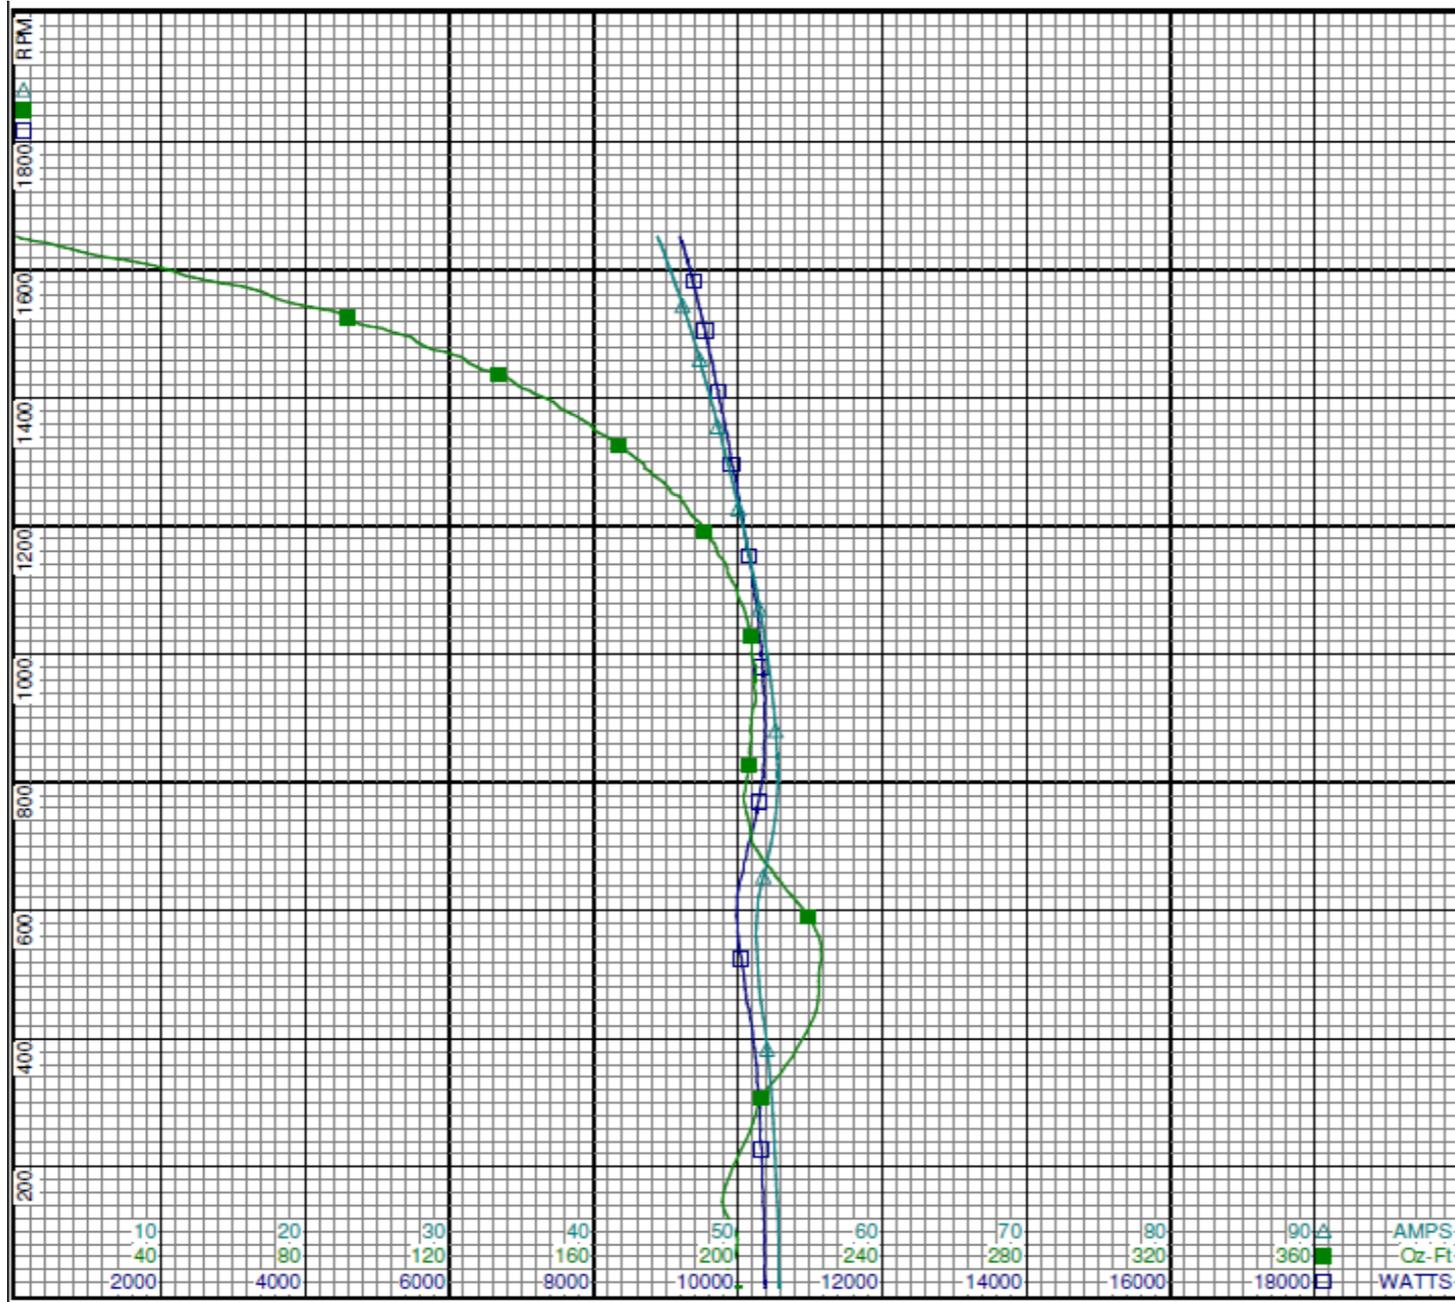

Dayton

Curve Descriptions:
 Motor(1) Test 9 Start 230V 60 Hz 4P
 3 line

- SPEED vs WATTS
- SPEED vs TORQUE
- △ SPEED vs ILine

Motor Ratings:
 (1) T063DAW2231 5K565BG

DRAWING NO. PAGE 6 of 8 REV.
 5K565BG -

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

Performance Data



5K565BG	REV. -
----------------	-----------

Dayton Manufacturing Company

Motor Description

Model: T063DAW2231 5K565BG
 Motor ID: 1
 Poles: 4
 Volts: 115/208-230
 Frequency: 60
 HP: 1 1/2
 Speed: 1725
 Phase: 1
 Protector: CEJ38CS


Test Conditions

Test Type: Run
 Test Number: 10
 Poles: 4
 Volts: 230
 Hz: 60
 Rotation:
 Special Cond:
 Speed Conn:
 TestBoard: Amps Performance Fixture #2
 Run Cap: 50 uFd
 Start Cap: 709 uFd
 Environment:
 Tested: 3/22/2006 11:33:58 AM
 Tested By: Sharp, Gerald
 Gear Ratio: 1:1
 Bearing Friction: -0.32 Oz-Ft
 Windage Torque: -1.92 Oz-Ft

Special Points	Vline (V)	Vaux (V)	Vcap (V)	Iline (A)	Imain (A)	Iaux (A)	Watts	RPM	Tq(Oz-ft)	HP	Eff(%)	PF (%)	Cap
18.26 OZ-FT	230.0	208.8	224.0	1.77	4.82	4.187	154	1795	0.00	0.000	0.0	37.8	49.6
	230.0	209.3	216.3	2.56	4.02	4.026	459	1779	18.26	0.387	62.7	77.9	49.4
	230.0	210.0	213.1	3.00	3.87	3.953	574	1775	25.89	0.547	71.1	83.2	49.2
36.52 OZ-FT	230.0	210.4	209.0	3.71	3.79	3.863	749	1770	36.52	0.770	76.6	87.8	49.0
	230.0	209.3	203.1	5.00	4.21	3.749	1053	1758	53.99	1.130	80.0	91.6	49.0
54.78 OZ-FT	230.0	209.2	202.8	5.06	4.24	3.744	1068	1758	54.78	1.146	80.1	91.7	49.0
1.5 HP	230.0	207.4	196.6	6.45	5.19	3.636	1377	1744	72.26	1.500	81.2	92.8	49.0
73.04 OZ-FT	230.0	207.3	196.3	6.52	5.25	3.630	1393	1743	73.04	1.516	81.2	92.9	49.1
	230.0	206.7	194.6	6.90	5.56	3.599	1476	1739	77.50	1.604	81.1	92.9	49.1
84 OZ-FT	230.0	205.8	191.9	7.50	6.08	3.552	1605	1732	84.00	1.732	80.5	93.0	49.1
1.725 HP	230.0	205.8	192.0	7.47	6.05	3.554	1598	1733	83.62	1.725	80.5	93.0	49.1
1725 RPM	230.0	204.9	188.9	8.18	6.69	3.500	1753	1725	91.64	1.882	80.1	93.2	49.1
91.3 OZ-FT	230.0	204.9	189.1	8.15	6.66	3.503	1747	1725	91.30	1.875	80.1	93.2	49.1
	230.0	204.1	186.7	8.74	7.23	3.459	1872	1719	96.55	1.975	78.7	93.1	49.2
	230.0	201.0	178.5	10.63	9.09	3.317	2271	1697	116.46	2.353	77.3	92.9	49.3
	230.0	197.9	170.7	12.59	11.10	3.192	2679	1674	132.69	2.644	73.6	92.6	49.6
	230.0	194.3	163.0	14.57	13.17	3.065	3069	1647	146.39	2.870	69.8	91.6	49.9
	230.0	190.4	155.5	16.53	15.28	2.938	3437	1620	158.74	3.061	66.5	90.4	50.1
	230.0	186.5	148.3	18.47	17.36	2.817	3791	1590	166.18	3.145	61.9	89.2	50.4
	230.0	182.3	141.4	20.40	19.44	2.693	4126	1556	170.58	3.161	57.2	87.9	50.5
	230.0	178.2	135.2	22.27	21.48	2.583	4431	1522	174.56	3.162	53.2	86.5	50.7
BDT OZ-FT	230.0	174.7	130.7	23.68	23.04	2.499	4642	1491	176.17	3.127	50.2	85.2	50.7
	230.0	173.8	129.5	24.06	23.46	2.480	4699	1483	175.41	3.096	49.2	84.9	50.8
	230.0	169.6	124.5	25.79	25.36	2.389	4954	1441	172.76	2.963	44.6	83.5	50.9
	230.0	165.0	120.1	27.48	27.21	2.307	5173	1394	167.33	2.777	40.1	81.8	51.0
	230.0	160.8	116.4	29.06	28.95	2.238	5373	1344	161.26	2.581	35.8	80.4	51.0
	230.0	156.5	113.4	30.57	30.60	2.179	5539	1291	151.81	2.333	31.4	78.8	51.0
	230.0	152.2	111.0	31.97	32.15	2.130	5680	1233	140.76	2.066	27.1	77.3	50.9
	230.0	148.2	109.3	33.28	33.59	2.091	5805	1171	128.35	1.789	23.0	75.8	50.7
	230.0	144.3	108.2	34.49	34.94	2.066	5894	1103	114.02	1.497	19.0	74.3	50.6
	230.0	140.6	107.5	35.61	36.19	2.043	5971	1030	98.28	1.205	15.1	72.9	50.4
	230.0	137.3	107.1	36.63	37.33	2.028	6023	952	80.42	0.911	11.3	71.5	50.2
	230.0	134.2	106.5	37.55	38.36	2.013	6037	868	59.58	0.616	7.6	69.9	50.1
	230.0	131.8	105.7	38.30	39.24	1.992	6016	776	36.76	0.340	4.2	68.3	50.0
	230.0	129.1	105.1	38.64	39.70	1.979	5899	679	19.03	0.154	1.9	66.4	50.0
	230.0	122.4	109.1	38.25	39.48	2.046	5793	581	34.24	0.237	3.0	65.9	49.8
	230.0	114.1	117.5	38.11	39.46	2.208	5920	478	62.25	0.354	4.5	67.5	49.8
	230.0	110.3	121.5	38.75	40.14	2.260	6055	361	52.35	0.225	2.8	67.9	49.3
	230.0	107.5	123.8	39.26	40.72	2.296	6114	234	31.52	0.088	1.1	67.7	49.2
PUT OZ-FT	230.0	209.0	217.2	2.46	4.07	4.046	428	1782	16.24	0.344	59.9	75.8	49.4
	230.0	103.8	127.1	39.48	41.03	2.360	6125	99	16.24	0.019	0.2	67.4	49.3

DRAWING NO.	PAGE 7 of 8	REV.
	5K565BG	-


Performance Data

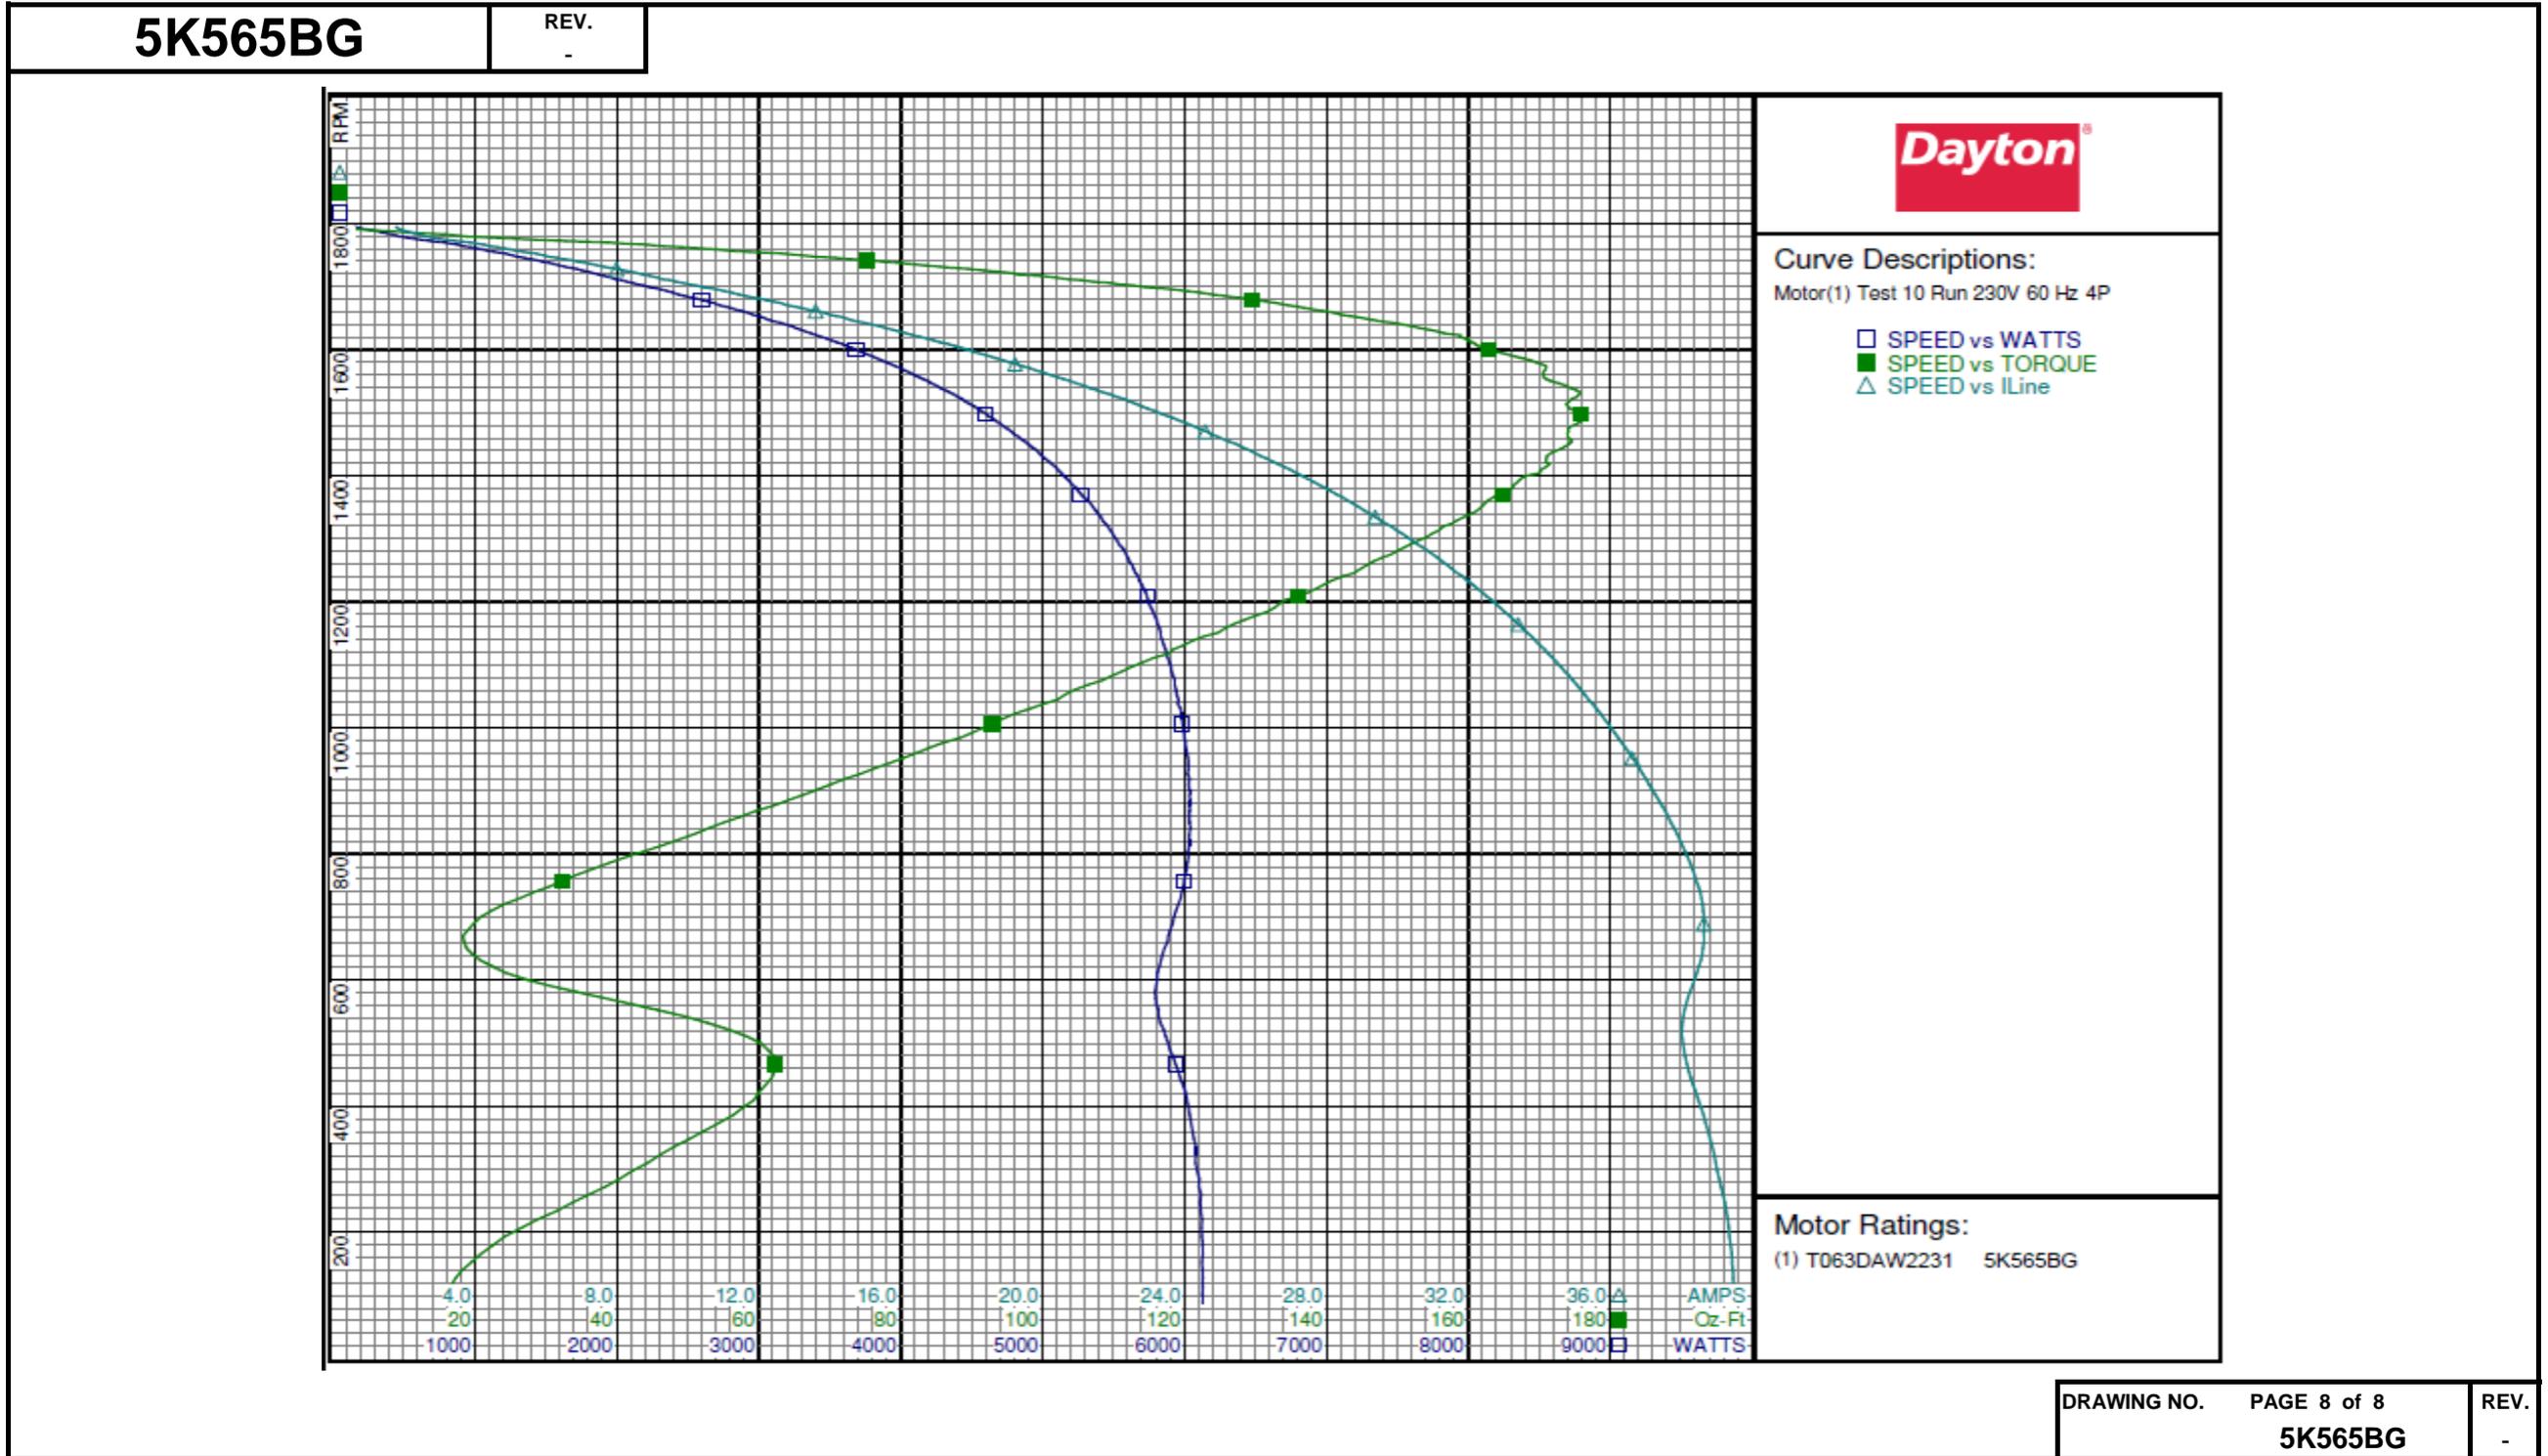

DRAWING NO.	PAGE 8 of 8	REV.
	5K565BG	-


Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

Wiring Diagram

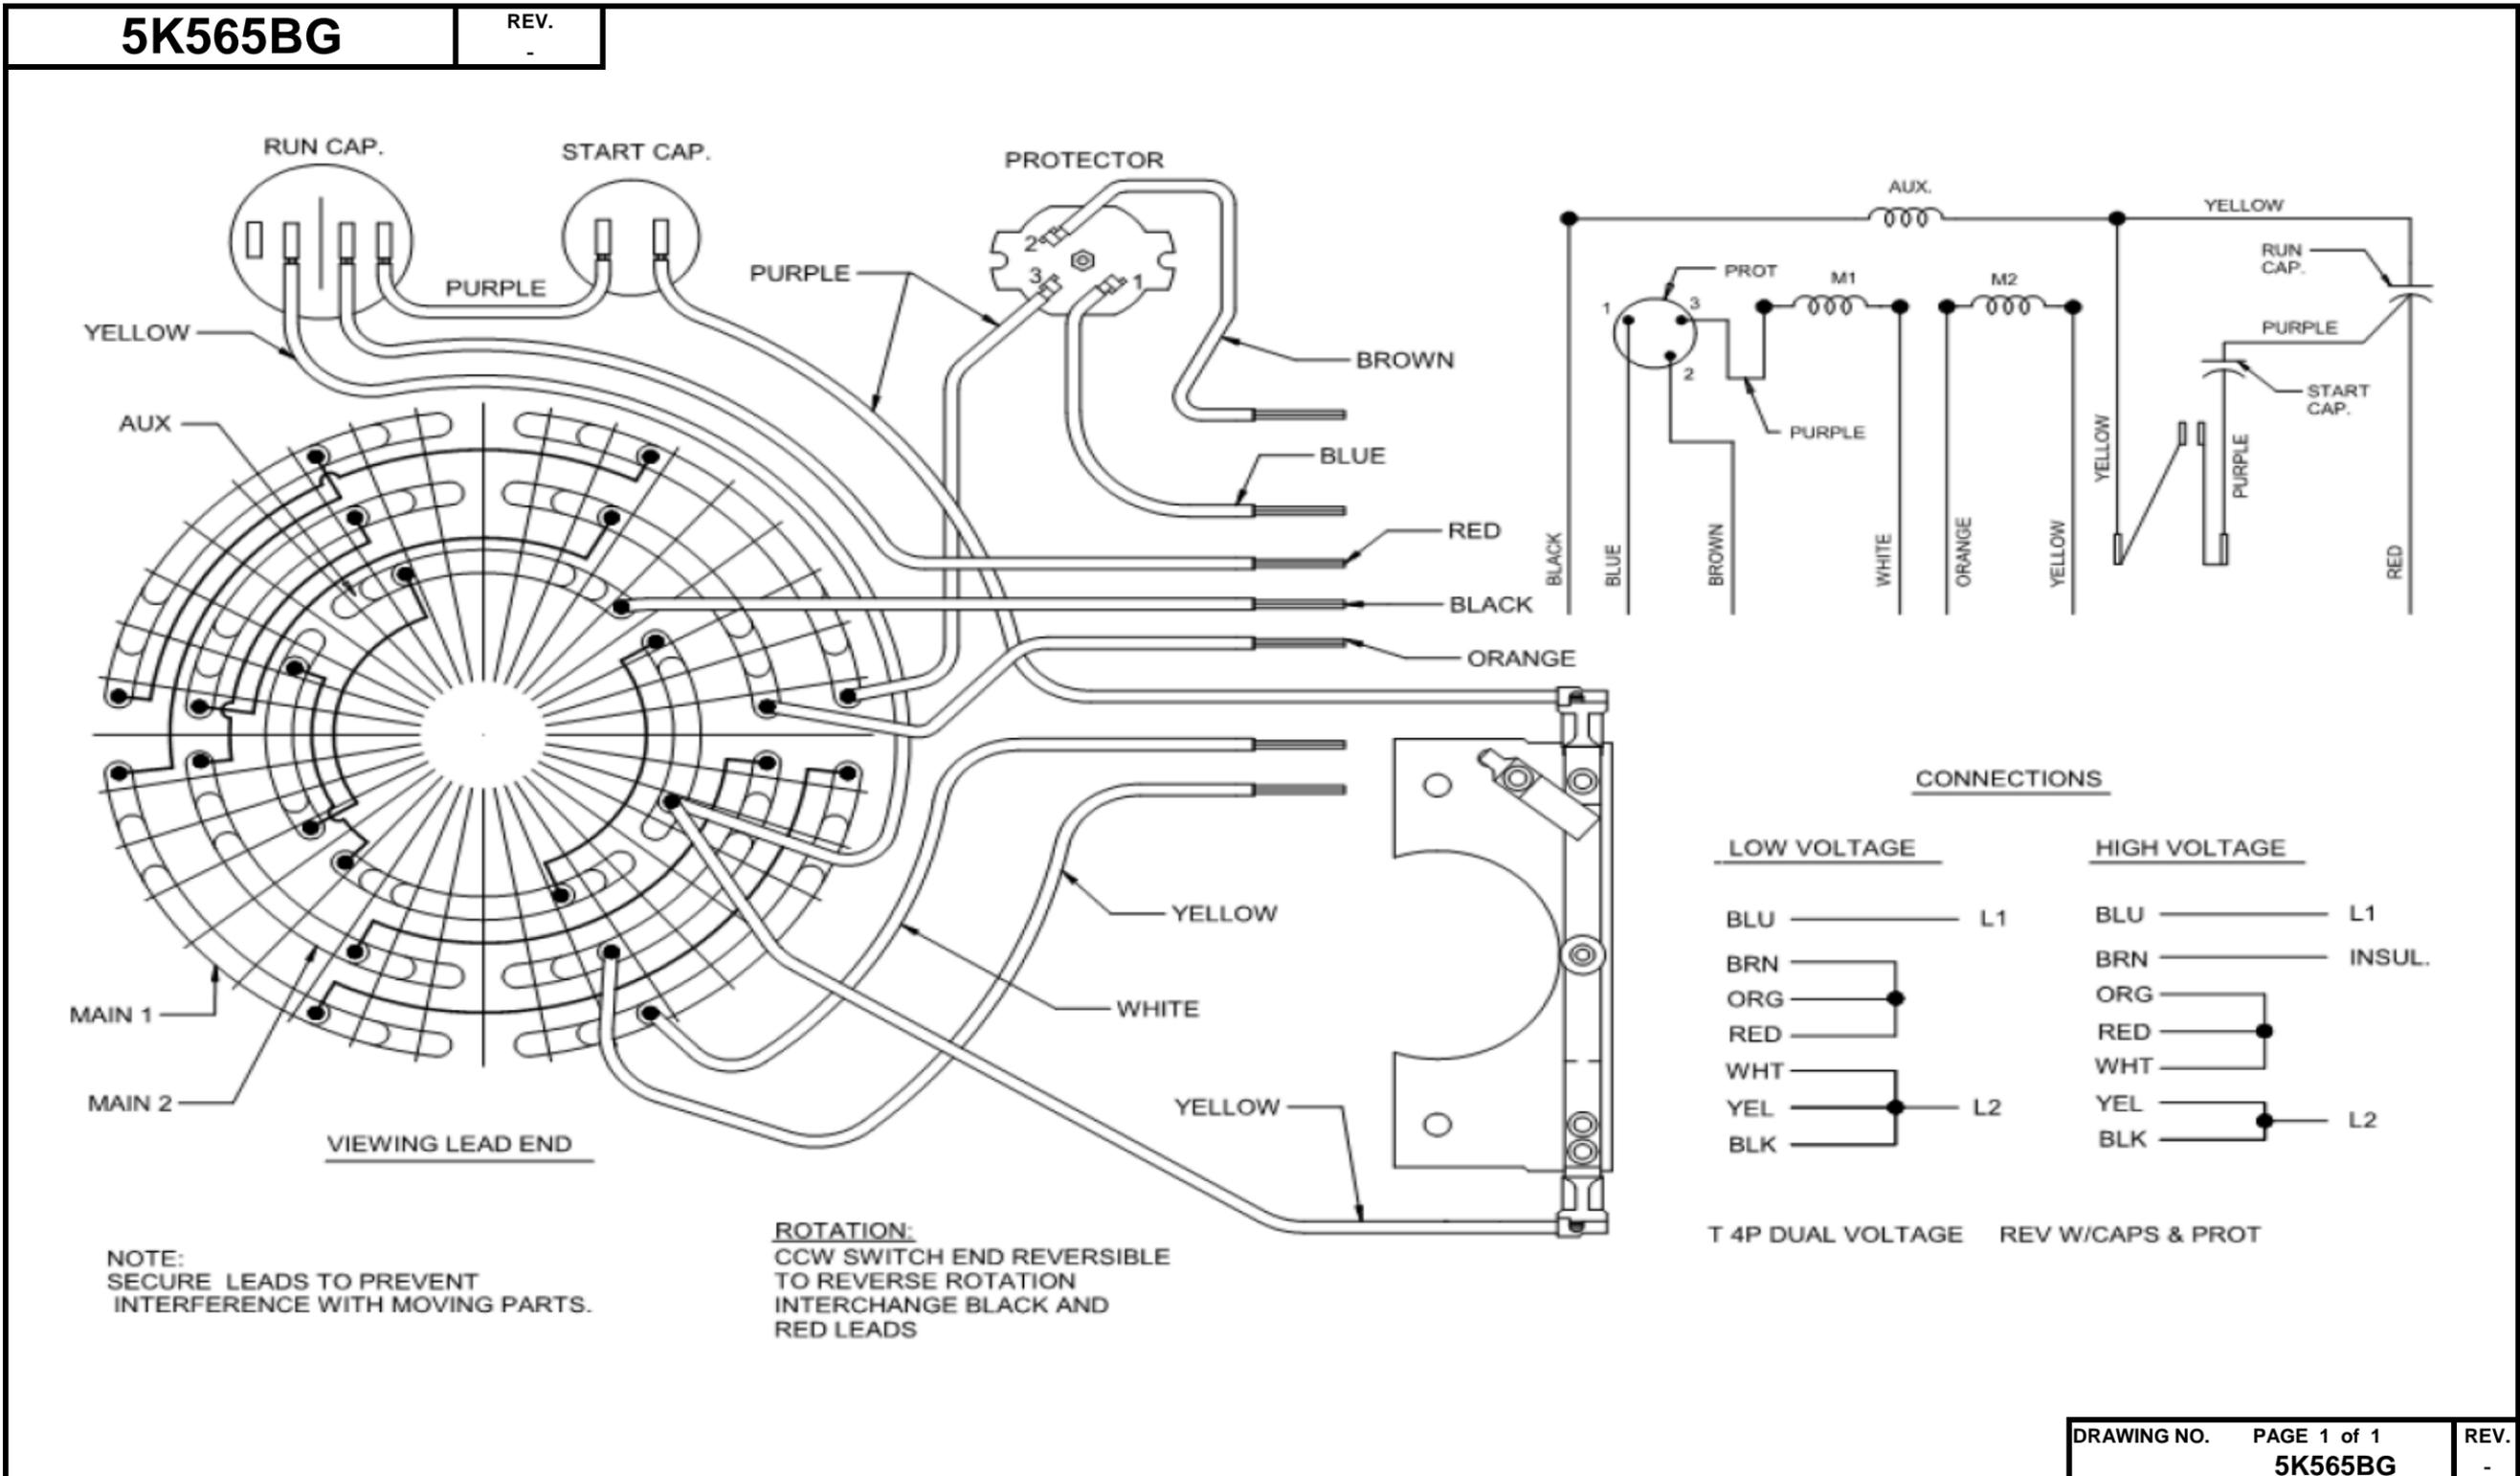

DRAWING NO. PAGE 1 of 1	REV.
5K565BG	-

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

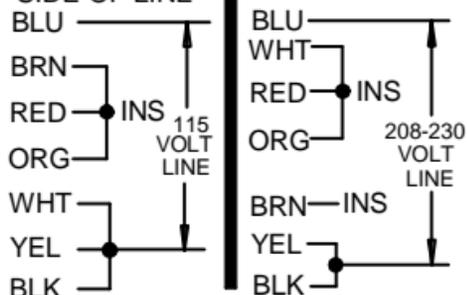Dayton[®]**INDUSTRIAL MOTOR****HP:** 1 1/2**VOLTS:** 115/208-230**AMPS:** 14.4/8.0-7.2**RPM:** 1725**DUTY:** CONT**SF:** 1.15**KVA CODE:** J**ENCL:** TEFC**THERMALLY PROTECTED:** AUTOMFG. NO. PROT. CODE: AVG. F.L.
EFF.**MTR REF:** T63CXDAW-2231**S.F. AT 208 V IS** 1.0Part No **5K565BG****PH:** 1**HZ:** 60**FR:** 56H**INS CL:** B**AMB:** 40 °C**SFA:** 15.8/8.0-7.9**Disconnect Power Before Making Any
Electrical Connections or Changes****CONNECTIONS****UNGROUND
SIDE OF LINE****MOTOR IS CCW ROTATION LEAD END
TO REVERSE ROTATION INTERCHANGE
RED AND BLACK LEADS**

Mfd for Dayton Electric Mfg. Co., Lake Forest, IL 60045 USA

Made in Mexico