

# Millermatic® 355

**MIG Power Source,  
Wire Feeder and Gun Package**



## Quick Specs

### Industrial Applications

General manufacturing  
General fabrication  
Maintenance and repair

### Processes

MIG (GMAW)  
Pulsed MIG (GMAW-P)  
Flux-cored (FCAW)

**Input Power** 3- or 1-phase, 208/240/460/575 V, 50/60 Hz

**Rated Output** 310 A at 29.5 V, 60% duty cycle

**Amperage Range** 20–400 A (3-phase and 1-phase 460/575 V),  
20–350 A (1-phase, 208/240 V)

**Net Weight** Machine only: 99 lb. (45 kg)  
Machine with running gear: 163 lb. (74 kg)

**Easy to Use. Versatility. Mobility.**

**THINK  
SIMPLY. WELD  
SMARTER.**

The Millermatic 355 gives you power, precision, simplicity and versatility. It MIG and pulsed-MIG welds mild steel, aluminum or stainless in thicknesses from 22 gauge to 1/2 inch. Advanced features make it easy for welders of any skill level to be productive and get great results. And because the Millermatic 355 operates on either single-phase or three-phase AC input power, it can work anywhere you do.



**Heavy-duty aluminum  
four-drive-roll system.**



**Millermatic 355 with  
MIG gun package shown.**

**NEW!**



**Easy-to-use machine**  
addresses issues due to lack  
of skilled labor.



**Welds a variety of materials  
and thicknesses** to help  
increase productivity.



**Capable of welding in various  
conditions and workplaces,**  
to go anywhere you need it  
to weld.

**TRUE BLUE®**  
3YR. WARRANTY

Power source is warrantied for three years, parts and labor.  
Gun warrantied for 90 days, parts only.



### Miller Electric Mfg. LLC

An ITW Welding Company  
1635 West Spencer Street  
P.O. Box 1079  
Appleton, WI 54912-1079 USA

### Equipment Sales US and Canada

Phone: 866-931-9730  
FAX: 800-637-2315  
International Phone: 920-735-4554  
International FAX: 920-735-4125

### MillerWelds.com




# Millermatic® 355 Features and Benefits

## Easy to Use



Pulsed MIG setup screen

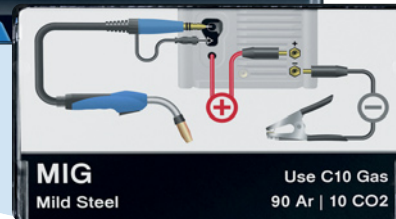

Connection screen for MIG process using C10 gas

**Easy-to-understand interface with 7-inch color LCD display** ensures proper machine setup and parameter selection, reducing setup time and increasing weld time.

- Quick-access backlit Auto-Set and Pulse buttons above the LCD display illuminate when active.
- Soft-key buttons below the display change function depending on which screen is displayed. Makes setup or change quick, easy and intuitive.
- Large text for easier readability.
- Intuitive connection setup images.
- Full troubleshooting descriptions versus help errors and look up codes.

**Auto-Set™ Elite** offers predefined weld settings to increase ease of use and ensure that the job is done right for operators of all skill levels.

- Available for MIG and pulsed MIG processes with the ability to fine-tune your settings.
- Set weld parameters by selecting wire and gas type, wire diameter and material thickness.



**Program mode** allows easy save and recall of favorite weld settings.

- Delivers greater productivity by eliminating the need to manually set or change parameters.
- Deliver consistent quality by welders of all skill levels by using prequalified weld settings.
- Minimize supervisor need to intervene.




**Trigger program select** increases productivity by eliminating the need to go back to machine to change weld settings. Simply tap gun trigger to select the program.



**Bernard BTB Gun 300 A MIG gun with AccuLock™ S consumable system**

- features a dual-locked, front-loading liner that optimizes wire feedability.
- Install AccuLock contact tips with a single turn.
  - AccuLock liner locks at front and back of gun to align with contact tip and power pin for a flawless wire feed path.
  - Durable, ergonomic handle improves grip and comfort.

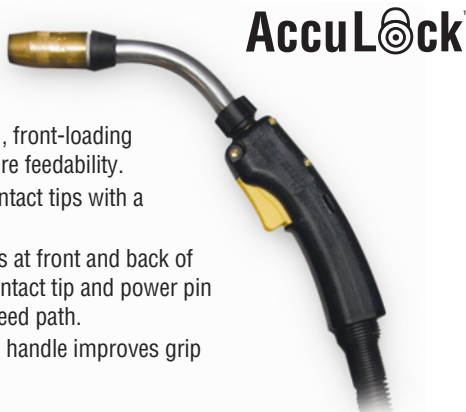

**Optional demo cable kit** (sold separately) powers the display through USB to train users in a quiet conference room or showroom versus connecting to shop power in a noisy work environment.



# Millermatic® 355 Features and Benefits

## Versatility



**Capabilities** include MIG, pulsed MIG and use of MIG, push-pull or spool guns.

**Compatible with push-pull MIG guns.** Increases productivity by allowing the use of 12-inch wire spools versus a spool gun's 4-inch spools. Reduces downtime changing wire spools.

**Auto-Gun Detect™** automatically adjusts voltage, wire speed and timers for faster switching between MIG, push-pull and spool guns.

**Single- or three-phase input power** provides versatility to utilize any North American power (208, 240, 460, 575 V).




**Input voltage selection switch** located in the wire drive compartment provides the ability to manually switch input voltage. An error message will be displayed if the wrong input voltage is utilized.



**Generator compatible.** The Millermatic 355 will be able to operate and provide full output when powered by generators with 19,000-watt (19 kW) output or higher. Limited output will occur when used with smaller generators.

**Pulsed MIG** welding delivers higher quality welds for ALL welders.

- Lower heat input for less distortion on thin materials and better puddle control on out-of-position welds.
- Less spatter minimizes post weld grinding and rework allowing more welding time.
- Perform welding applications that couldn't be done in the past.
- Ideal for MIG welding aluminum and stainless steel.



| Best For               | Standard Spray | Pulsed MIG | Short Circuit |
|------------------------|----------------|------------|---------------|
| Gap Filling            | D              | B          | A             |
| Low Heat Input         | D              | B          | A             |
| Out-of-Position Welds  |                | A          | B             |
| Low Spatter            | A              | A          | C             |
| Thick Metals           | A              | A          | D             |
| Thin Metals            |                | B          | A             |
| Increased Travel Speed | A              | A          | B             |
| Aluminum MIG Welding   | C              | A          | C             |

**HOT** **COLD**

**Ratings A, B, C, and D** are relative values. An "A" rating indicates a best fit between your performance needs and process. A "blank" rating indicates that the process is not recommended for that application.

## Mobility



**Easy to maneuver or integrate** within the work cell.

### Optional EZ-Latch™ running gear

**EZ-Latch running gears** are available in single cylinder and dual cylinder models (included with package or can be ordered separately). Operators no longer need to lift machine AND running gear into the truck. Latches secure machine to running gear. Simply loosen the latch retaining knob and rotate latches to disengage machine from running gear for easy portability. Cylinder racks feature bottle forward technology for increased stability when moving along an incline and running gears have built-in storage for accessories. Dual cylinder model includes an elevated gun and cable rack to keep cables off the floor and tangle free.






# Specifications (Subject to change without notice.)



| Input Power           | Voltage Range in CV Mode | Welding Amperage Range | Rated Output                    | Amps Input at Rated Output, 60 Hz |      |      |      |      |      | Max. Open-Circuit Voltage | Wire Feed Speed                 | Wire Type and Diameter                                                                                                                                                                                                                                                                   | Dimensions                                                                                                                                                                                                                  | Net Weight                                                                                         |
|-----------------------|--------------------------|------------------------|---------------------------------|-----------------------------------|------|------|------|------|------|---------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| 3-phase               | 12–34 V                  | 20–400 A               | 310 A at 29.5 V, 60% duty cycle | 32.3                              | 28.8 | 18.2 | 15.4 | 15.3 | 11.5 | 90 VDC                    | 50–800 ipm<br>(1.3–20.3 m/min.) | Steel:<br>.035–.045 in.<br>(0.9–1.2 mm)<br>Stainless:<br>.023–.045 in.<br>(0.6–1.2 mm)<br>Aluminum:<br>.035–.047 in.<br>(0.9–1.2 mm)<br>Flux-cored:<br>.035–.045 in.<br>(0.9–1.2 mm)<br>Metal core:<br>.045–.052 in.<br>(1.2–1.3 mm)<br>Silicon bronze:<br>.030–.035 in.<br>(0.8–0.9 mm) | <b>Machine only</b><br>H: 19.25 in.<br>(489 mm)<br>W: 13.75 in.<br>(349 mm)<br>D: 26.25 in.<br>(667 mm)<br><b>Machine with running gear</b><br>H: 32 in.<br>(813 mm)<br>W: 13.75 in.<br>(349 mm)<br>D: 45 in.<br>(1,143 mm) | <b>Machine only</b><br>99 lb.<br>(45 kg)<br><b>Machine with running gear</b><br>163 lb.<br>(74 kg) |
| 1-phase, 460 or 575 V | 12–34 V                  | 20–400 A               | 310 A at 29.5 V, 60% duty cycle | —                                 | —    | 35.6 | 32.3 | 15.0 | 11.1 |                           |                                 |                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                             |                                                                                                    |
| 1-phase, 208 or 240 V | 12–32 V                  | 20–350 A               | 310 A at 29.5 V, 60% duty cycle | 69.6                              | 62.5 | —    | —    | 15.0 | 11.1 |                           |                                 |                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                             |                                                                                                    |


Certified by Canadian Standards Association to both the Canadian and U.S. Standards.

## Control Panel

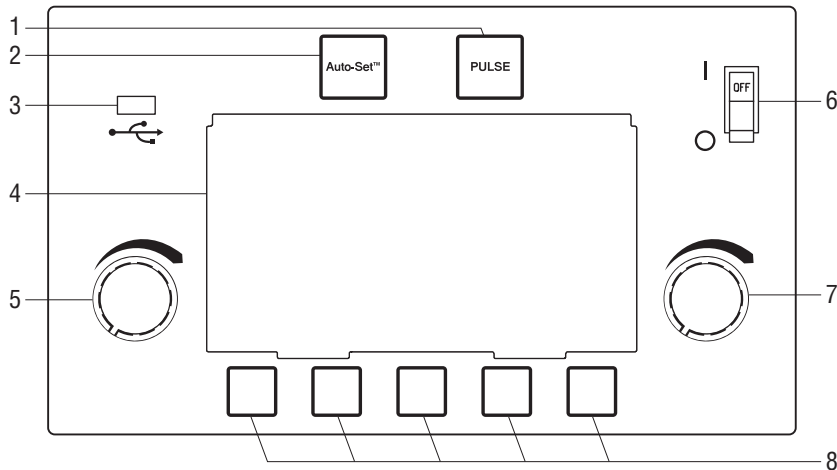

1. Pulse Button
2. Auto-Set Button
3. USB Port
4. Color LCD Display
5. Left Adjustment Knob  
(Adjusts voltage, arc length or parameter values depending on mode.)
6. Power Switch
7. Right Adjustment Knob  
(Adjusts wire feed speed or parameter values depending on mode.)
8. Soft Keys  
(Multiple functions depending on screen displayed.)

## Performance Data

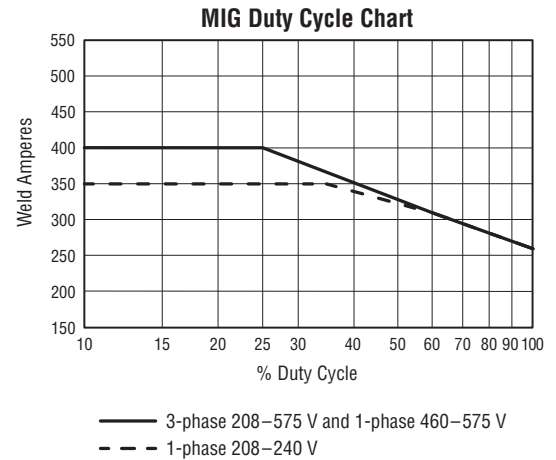

## Millermatic® 355 Packages



**907808**  
Machine only

### Comes complete with:

- Power source with 9 ft. (2.7 m) industrial power cord
- 15 ft. (4.5 m) 300-amp Bernard® BTB MIG gun with Bernard® AccuLock™ S consumables for .035/.045 in. (0.9/1.2 mm) wire
- 10 ft. (3 m) work cable with clamp and 50 mm Dinse-style connector
- Flow gauge regulator and gas hose for argon or AR/CO<sub>2</sub> mix
- .035/.045 in. (0.9/1.2 mm) reversible drive rolls
- Extra .035 and .045 in. (0.9 and 1.2 mm) contact tips
- Material thickness gauge



**951926**  
Machine with  
MIG gun  
package

### Comes complete with:

- Power source with 9 ft. (2.7 m) industrial power cord
- 15 ft. (4.5 m) 300-amp Bernard® BTB MIG gun with Bernard® AccuLock™ S consumables for .035/.045 in. (0.9/1.2 mm) wire
- 10 ft. (3 m) work cable with clamp and 50 mm Dinse-style connector
- Flow gauge regulator and gas hose for argon or AR/CO<sub>2</sub> mix
- .035/.045 in. (0.9/1.2 mm) reversible drive rolls
- Extra .035 and .045 in. (0.9 and 1.2 mm) contact tips
- Material thickness gauge
- EZ-Latch™ single cylinder running gear
- Chain to secure gas cylinder



**951927**  
Machine with  
Aluma-Pro gun  
package

### Comes complete with:

- Power source with 9 ft. (2.7 m) industrial power cord
- 25 ft. (7.6 m) XR-Aluma-Pro™ air-cooled push-pull MIG gun with Miller® FastTip™ consumables for .035/.047 in. (0.9/1.2 mm) aluminum wire
- 10 ft. (3 m) work cable with clamp and 50 mm Dinse-style connector
- Flow gauge regulator and gas hose for argon or AR/CO<sub>2</sub> mix
- .035/.047 in. (0.9/1.2 mm) reversible U-grooved drive rolls
- Extra .035 and .047 in. (0.9 and 1.2 mm) contact tips
- Material thickness gauge
- EZ-Latch™ single cylinder running gear
- Chain to secure gas cylinder



## EZ-Latch™ Single Cylinder Running Gear 301449

Running gear with a single cylinder rack and storage compartment. Latches secure machine to cart. Simply rotate latches to disengage machine from cart for easy portability.

## EZ-Latch™ Dual Cylinder Running Gear 951769

Similar to above, but with a dual cylinder rack which allows operator to easily store two gas cylinders. Includes elevated gun and cable rack (shown below) to keep cables off the floor and tangle free.



## EZ-Latch™ Dual Cylinder Rack with Elevated Gun and Cable Rack 301481

Converts an EZ-Latch single cylinder running gear into a dual cylinder rack to easily store two gas cylinders. Gun and cable rack keeps cables off the floor and tangle free. (Included with EZ-Latch dual cylinder running gear.)



## Demo Cable Kit 289696

Demo cable kit will power the front display through the USB. Powered via the supplied 115-volt adapter.

## MIG Gun



### Bernard® BTB Gun 300 A with AccuLock™ S Consumables Q3015AE4VMA

15 ft. (4.6 m)  
Industrial 300-amp MIG gun with consumables for .035 in. (0.9 mm) wire.

Order through Bernard Customer Service at 1-855-MIGWELD (1-855-644-9353).

## Spool Guns



### Spoolmatic® 15A Spool Gun 195156 Spoolmatic® 30A Spool Gun 130831

Ideal for aluminum welding jobs. Air-cooled, one-pound spool gun with 15-foot (4.6 m) or 30-foot (9.1 m) cable assembly. Rated at 200 amps at 100 percent duty cycle. For detailed information, see Spoolmatic literature M/1.73.



### Spoolmate™ 200 Spool Gun 300497

Reliable and economical spool gun perfect for hobbyists and light fabricators who weld aluminum. Handles .030–.035 inch (0.8–0.9 mm) aluminum wires and .023–.035 inch (0.6–0.9 mm) steel/stainless steel wires. Rated at 160 amps, 60 percent duty cycle with 20-foot cable assembly. For detailed information, see Spoolmate literature M/1.47.

### Optional Spoolmate™ 200 Head Tubes

300591 45-degree head tube  
300592 9-inch extension head tube  
243385 5-inch head tube

## Push-Pull Guns



### XR-Aluma-Pro™ Push-Pull Guns

301568 15 ft. (4.6 m)

301569 25 ft. (7.6 m)

Air-cooled gooseneck-style gun for .030–.047 inch (0.8–1.2 mm) aluminum. Rated at 300 amps at 100 percent duty cycle.



### XR-Aluma-Pro™ Lite Push-Pull Gun

300948 25 ft. (7.6 m)

Air-cooled gooseneck-style gun for .030–.047 inch (0.8–1.2 mm) aluminum. Rated at 175 amps at 60 percent duty cycle.



### XR™-Pistol-Pro Push-Pull Guns

300782 15 ft. (4.6 m), air-cooled

300783 25 ft. (7.6 m), air-cooled

Air-cooled pistol-grip gun for .030–.047 inch (0.8–1.2 mm) aluminum. Rated at 200 amps at 100 percent duty cycle.

### U-Grooved Aluminum Drive Roll and Accessory Kits for XR-Aluma-Pro Push-Pull Guns

195311 .035 in. (0.9 mm)

195313 .047 in. (1.2 mm)

Kits include Millermatic U-grooved drive rolls, nylon wire guides and contact tips.

## Consumables

### For Bernard® BTB Gun 300 A

**Standard Bernard® AccuLock™ S Consumables\***  
Consumables for increased durability and longer life when guns are used in industrial applications.

#### Contact Tips (10 per package)

|                 |                   |
|-----------------|-------------------|
| <b>T-A023CH</b> | .023 in. (0.6 mm) |
| <b>T-A030CH</b> | .030 in. (0.8 mm) |
| <b>T-A035CH</b> | .035 in. (0.9 mm) |
| <b>T-A039CH</b> | .039 in. (1.0 mm) |
| <b>T-A045CH</b> | .045 in. (1.2 mm) |
| <b>T-A052CH</b> | .052 in. (1.4 mm) |

#### Nozzles

|                 |                                     |
|-----------------|-------------------------------------|
| <b>N-A5800C</b> | Copper, 5/8 in. ID, flush, standard |
| <b>N-A5818C</b> | Copper, 5/8 in. ID, 1/8 in. recess  |
| <b>N-A5814C</b> | Copper, 5/8 in. ID, 1/4 in. recess  |

#### Diffuser D-A1

#### Monocoil 15 ft. Replacement Liners

|                  |                            |
|------------------|----------------------------|
| <b>LA1A-15</b>   | .023/.030 in. (0.6/0.8 mm) |
| <b>LA2A-15</b>   | .030/.035 in. (0.8/0.9 mm) |
| <b>LAD3A-15</b>  | .035/.045 in. (0.9/1.2 mm) |
| <b>LADA4A-15</b> | .052 in. (1.4 mm)          |

*\*Order Bernard parts and consumables through Bernard Customer Service at 1-855-MIGWELD (1-855-644-9353).*

### For Spoolmatic® Spool Guns and XR™ Push-Pull Guns

#### For Aluminum Wire

##### FasTip™ Contact Tips (25 per package)

|               |                               |
|---------------|-------------------------------|
| <b>206186</b> | Heavy-duty, .030 in. (0.8 mm) |
| <b>206187</b> | Heavy-duty, .035 in. (0.9 mm) |
| <b>206188</b> | Heavy-duty, .040 in. (1.0 mm) |
| <b>206189</b> | Heavy-duty, 3/64 in. (1.2 mm) |
| <b>206191</b> | Heavy-duty, 1/16 in. (1.6 mm) |
| <b>209026</b> | Tapered, .030 in. (0.8 mm)    |
| <b>209027</b> | Tapered, .035 in. (0.9 mm)    |
| <b>209029</b> | Tapered, 3/64 in. (1.2 mm)    |
| <b>209030</b> | Tapered, 1/16 in. (1.6 mm)    |

#### Screw-On Nozzles

|               |                                           |
|---------------|-------------------------------------------|
| <b>199610</b> | Brass, 1/2 in. orifice, tapered           |
| <b>199611</b> | Brass, 3/4 in. orifice, straight          |
| <b>199612</b> | Brass, 3/4 in. orifice, straight HD       |
| <b>199613</b> | Brass, 5/8 in. orifice, tapered           |
| <b>199614</b> | Brass, 5/8 in. orifice, tapered HD        |
| <b>209035</b> | Copper, 3/8 in. orifice, tapered          |
| <b>199615</b> | Copper, 1/2 in. orifice, tapered          |
| <b>209036</b> | Copper, 1/2 in. orifice, tapered HD       |
| <b>198855</b> | Copper, 5/8 in. orifice, tapered          |
| <b>199618</b> | Copper, 5/8 in. orifice, tapered HD       |
| <b>207313</b> | Copper, 5/8 in. orifice, tapered 15/16 OD |
| <b>199616</b> | Copper, 3/4 in. orifice, straight         |
| <b>199617</b> | Copper, 3/4 in. orifice, straight HD      |

#### Bernard® Centerfire™ Consumables\*

##### "T" Series Contact Tips\*

|                |                   |
|----------------|-------------------|
| <b>T-035AL</b> | .035 in. (0.9 mm) |
| <b>T-047AL</b> | .047 in. (1.2 mm) |

#### Small Nozzles

|                  |                                        |
|------------------|----------------------------------------|
| <b>NST-3818B</b> | Brass, 3/8 in. ID, 1/8 in. tip recess  |
| <b>NS-1218B</b>  | Brass, 1/2 in. ID, 1/8 in. tip recess  |
| <b>NS-1200B</b>  | Brass, 1/2 in. ID, flush tip           |
| <b>NS-5818B</b>  | Brass, 5/8 in. ID, 1/8 in. tip recess  |
| <b>NS-1218C</b>  | Copper, 1/2 in. ID, 1/8 in. tip recess |

*\*Order Bernard parts and consumables through Bernard Customer Service at 1-855-MIGWELD (1-855-644-9353).*

### For Spoolmate™ 200 Spool Gun

*Note: Spoolmate 200 spool gun ships with (2) .030 in. and (2) .035 in. contact tips and (1) nozzle.*

#### For Standard Heavy-Duty Head Tube

##### Contact Tips (5 per package)

|               |                   |
|---------------|-------------------|
| <b>199387</b> | .030 in. (0.8 mm) |
| <b>199388</b> | .035 in. (0.9 mm) |

#### Nozzle 050622

#### For Optional Head Tubes

*Note: The same consumables are used on 45-degree, 5-inch, and 9-inch extension head tubes.*

##### Contact Tips (5 per package)

|               |                                                                     |
|---------------|---------------------------------------------------------------------|
| <b>199730</b> | .024 in. (0.6 mm)<br>(requires V-knurled drive roll <b>136135</b> ) |
| <b>186419</b> | .030 in. (0.8 mm)                                                   |
| <b>186406</b> | .035 in. (0.9 mm)                                                   |

#### Nozzle 186405

### For Millermatic® 355

*Note: Machine drive roll kits include four drive rolls and an inlet guide.*

#### V-Grooved Drive Roll Kits (hard wire)

|               |                                                                |
|---------------|----------------------------------------------------------------|
| <b>087132</b> | .023 in. (0.6 mm)                                              |
| <b>046780</b> | .030 in. (0.8 mm)                                              |
| <b>046781</b> | .035 in. (0.9 mm)                                              |
| <b>227061</b> | .035 and .045 in. (0.9 and 1.2 mm)<br>combination (reversible) |
| <b>046782</b> | .045 in. (1.2 mm)                                              |
| <b>046783</b> | .052 in. (1.4 mm)                                              |

#### U-Grooved Drive Roll Kits (aluminum wire)

|               |                   |
|---------------|-------------------|
| <b>044750</b> | .035 in. (0.9 mm) |
| <b>046785</b> | .047 in. (1.2 mm) |

#### V-Knurled Drive Roll Kits

(flux-cored or difficult-to-feed wire)

|               |                   |
|---------------|-------------------|
| <b>046792</b> | .035 in. (0.9 mm) |
| <b>046793</b> | .045 in. (1.2 mm) |
| <b>046794</b> | .052 in. (1.4 mm) |

## Ordering Information

| Power Source and Options                                      | Stock No.                      | Description                                                                                                                                | Qty. | Price |
|---------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------|-------|
| <b>Millermatic® 355</b>                                       | <b>907808</b>                  | 3- or 1-phase, 208/240/460/575 V, 50/60 Hz                                                                                                 |      |       |
| <b>Millermatic® 355</b> with MIG Gun Package                  | <b>951926</b>                  | Includes EZ-Latch™ single cylinder running gear                                                                                            |      |       |
| <b>Millermatic® 355</b> with Aluma-Pro Gun Package            | <b>951927</b>                  | Includes EZ-Latch™ single cylinder running gear                                                                                            |      |       |
| <b>Accessories</b>                                            |                                |                                                                                                                                            |      |       |
| EZ-Latch™ Single Cylinder Running Gear                        | <b>301449</b>                  | Running gear with single cylinder rack                                                                                                     |      |       |
| EZ-Latch™ Dual Cylinder Running Gear                          | <b>951769</b>                  | Running gear with dual cylinder rack and elevated gun and cable rack                                                                       |      |       |
| EZ-Latch™ Dual Cylinder Rack with Elevated Gun and Cable Rack | <b>301481</b>                  | Upgrades single cylinder rack to dual (included with EZ-Latch dual cylinder running gear)                                                  |      |       |
| Demo Cable Kit                                                | <b>289696</b>                  |                                                                                                                                            |      |       |
| <b>Guns</b>                                                   |                                |                                                                                                                                            |      |       |
| Bernard® BTB Gun 300 A with AccuLock™ S Consumables           | <b>Q3015AE4VMA</b>             | 15 ft. (4.6 m), 250 A, .035 in. (0.9 mm) wire. <b>Order through Bernard Customer Service at 1-855-MIGWELD (1-855-644-9353)</b>             |      |       |
| Spoolmatic® 15A Spool Gun                                     | <b>195156</b>                  | 15 ft. (4.6 m), 200 A, .030–.047 in. (0.8–1.2 mm) for aluminum wire                                                                        |      |       |
| Spoolmatic® 30A Spool Gun                                     | <b>130831</b>                  | 30 ft. (9 m), 200 A, .030–.047 in. (0.8–1.2 mm) for aluminum wire                                                                          |      |       |
| Spoolmate™ 200 Spool Gun                                      | <b>300497</b>                  | 20 ft. (6 m), 160 A, .030–.035 in. (0.8–0.9 mm) for aluminum wire, .023–.035 in. (0.6–0.9 mm) for steel/stainless steel wire               |      |       |
| Optional Spoolmate™ 200 Head Tubes                            |                                | See page 6                                                                                                                                 |      |       |
| XR-Aluma-Pro™ Guns (air-cooled)                               | <b>301568</b><br><b>301569</b> | 15 ft. (4.6 m), 300 A, .030–.047 in. (0.8–1.2 mm) for aluminum wire<br>25 ft. (7.6 m), 300 A, .030–.047 in. (0.8–1.2 mm) for aluminum wire |      |       |
| XR-Aluma-Pro™ Lite Gun (air-cooled)                           | <b>300948</b>                  | 25 ft. (7.6 m), 175 A, .030–.047 in. (0.8–1.2 mm) for aluminum wire                                                                        |      |       |
| XR™-Pistol-Pro Guns (air-cooled)                              | <b>300782</b><br><b>300783</b> | 15 ft. (4.6 m), 200 A, .030–.047 in. (0.8–1.2 mm) for aluminum wire<br>25 ft. (7.6 m), 200 A, .030–.047 in. (0.8–1.2 mm) for aluminum wire |      |       |
| <b>Consumables</b>                                            |                                |                                                                                                                                            |      |       |
| Contact Tips                                                  |                                | See page 7                                                                                                                                 |      |       |
| Replacement Liners                                            |                                | See page 7                                                                                                                                 |      |       |
| Nozzles                                                       |                                | See page 7                                                                                                                                 |      |       |
| Drive Rolls                                                   |                                | See page 6 for gun drive rolls and page 7 for machine drive rolls                                                                          |      |       |

Date:

Total Quoted Price:

Distributed by:

